

Product Specifications

www.ezconcept.com

EZCONCEPT

Architectural Finishing Systems



EZCONCEPT

Architectural Finishing Systems

As manufacturers of the world renowned EzyJamb door jamb systems, EZ Concept's openings and finishings products produce minimalistic flush finishes by eliminating trims and traditional timber systems for commercial, residential and industrial interiors.

EXPERIENCE EZ CONCEPT

Opening Products

EzyJamb
Page 06 | The Flush Finish Door Jamb System

SlideSet
Page 26 | The Flush Finish Pocket Door Solution

CavKit
Page 30 | Pocket Door Trim Kit

EzyDor
Page 32 | Primed Solid Core Flush Door

RocYork
Page 34 | Door Hardware

AccessDor
Page 44 | Access Panel Solutions

Finishing Products

EzyCap
Page 52 | Wall End Solution

FastCap
Page 53 | Wall & Ceiling Recessed Channel

EzyPelmet
Page 54 | Recessed Window Pelmet Systems

AluBase
Page 56 | Aluminum Baseboard Trim

EzyReveal
Page 58 | Premium Trim Free Window Reveals

Opening Products



EzyJamb

ISD | Inswing Door Frame

EzyJamb Inswing Door - ISD is the ultimate door jamb system to achieve a seamless look in hallways and corridors. The EzyJamb ISD frame is suitable for applications that require the door to open inwardly from the flush side of the door, for a clean line along the wall face. The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing and is available with various hinge options.




Product Details

EZYJAMB ISD INSWING DOOR FRAME - FOR 1-3/4 (ISc) AND 2-1/4 (ISd) DOORS

Material	18ga Galvanneal		
Min / Max Width	10" / 4' (Single)	20" / 8' (Double)	*(Custom sizes available on request)*
Min / Max Height	24" / 10-0'		*(Custom sizes available on request)*
Wall Throat	3-3/4" - 15" in 1/8" increments		*(Custom sizes available on request)*
Fire Rating	20 minutes (Pending)		

Hinge Options


1. Concealed Hinges
2. Mortise Hinges
3. Pivot Hinges

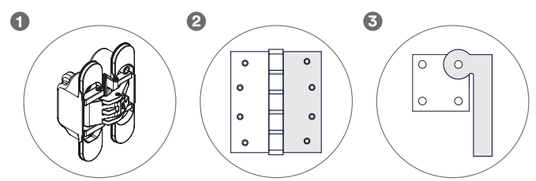

ⓘ Continuous Hinges also available upon request.


Preparation Options

ISc | 1-3/4"

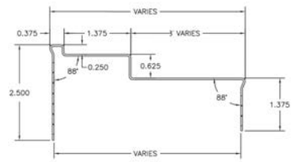

Strike Options	T-Strike ASA Strike NoHa Extended	PLS 24 Flushbolt DeadBolt HES 8300 / 8500	**Pivot Options**	RocYork 3/4" Offset Pivot	
			Closer Options	RocYork Concealed Closer	
Hinge Options	4" Standard Weight Mortise Hinge RocYork RYST-60 Continuous Hinge	(10'0" Max Height) (8' Max Height)			
Misc.	Door Position Switch		**Holders and Stops**	GJ 410 Series	

ISd | 2-1/4"



Strike Options	T-Strike ASA Strike DeadBolt PLS 24 T-Strike Roller Latch (Short lip)	NoHa Extended Flushbolt Full Lip Roller HES 8300/8500	**Pivot Options**	RocYork 3/4" Offset Pivot Rixson 3/4" Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 0180 ABH Intermediate Pivot 019	
Hinge Options	4-1/2" Standard Weight Mortise Hinge RocYork RYST-80 / RYST-120 Tectus 340 / 540 Contiuous Hinge		**Closer Options**	RocYork Concealed Closer LCN 3130 Dorma ITS96	
Misc.	EPT Power Transfer Door Position Switch		**Holders and Stops**	Rixson 1 & 2 Series Rockwood 100 & 200 Series ABH 1000 & 4000 Series GJ 100 & 410 Series	

Specification Details

- Frame Type
- Door Thickness
- Frame Width
- Frame Height
- Finished Wall Thickness
- Fire Rating
- Strike Type
- Strike Height
- Frame Handing
- Hinge Type
- Hinge Quantity

EX. ISd - 2.25 - 3-0' - 7-0' - 4-7/8 - N/A - ASA-38" - RH - RYST80 - 3

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, Cased Openings, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.


Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.

Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer lead times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

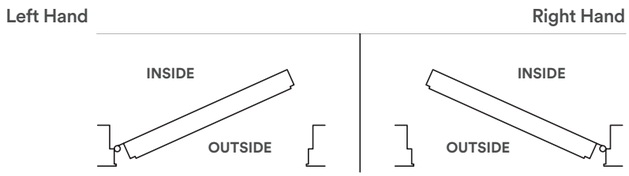

ⓘ Hand all doors by standing outside and facing the door.

Installation Instructions


Step 1


Refer to Rough Opening guide (pages 22, 23)

Ensure that the **stud opening** is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.

When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

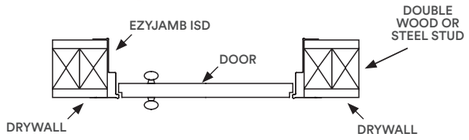


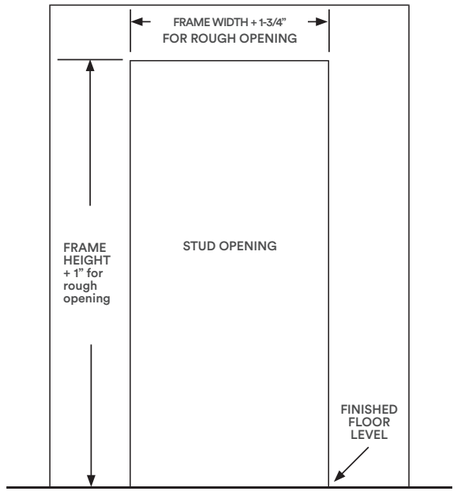


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb with #8 drywall screws. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail 'D'* and beside hinge position - both above and below hinge if using concealed hinges as *Detail 'E'*.

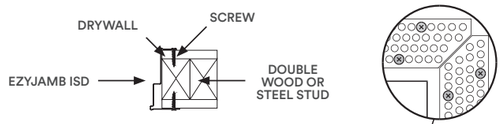

Step 2A | Head Installation

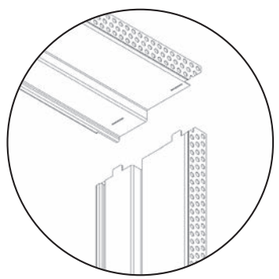

Locate fixing tabs to header.

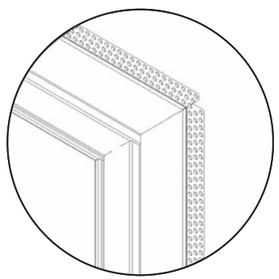


Double screw all ends as Detail D.

Installation Instructions

Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.


Install door prior to mudding to ensure proper tolerances, then disassemble and reinstall after mudding.

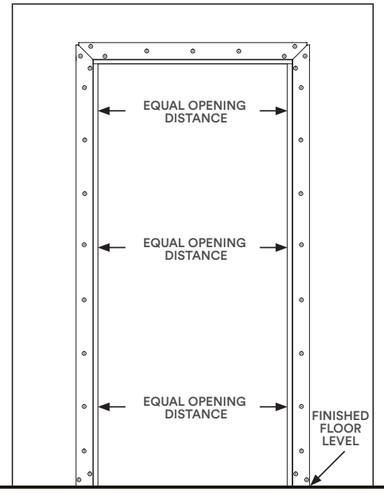


Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

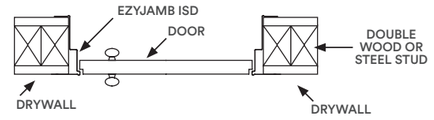

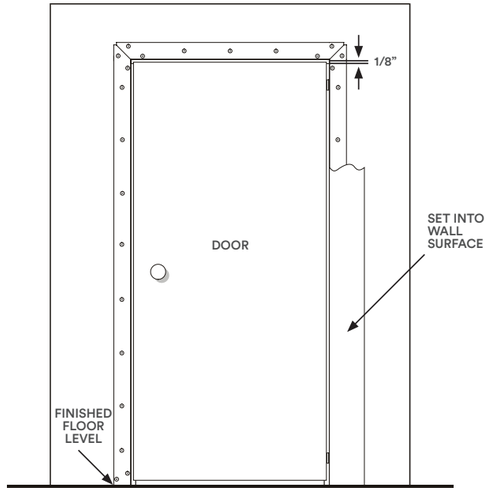



Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

https://ezconcept.com.au/resources/installation-instructions/

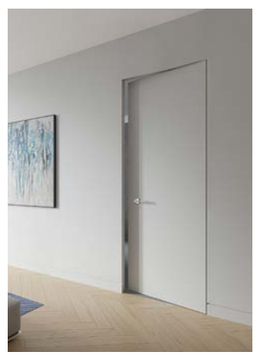

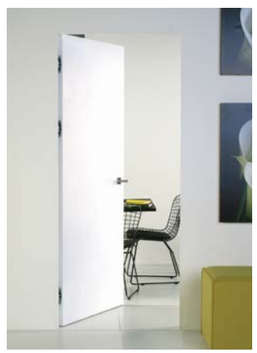





EzyJamb

SRC | Single Rabbet Door Frame

Give your project a clean cut trim-free edge with the EzyJamb Single Rabbet – SRC door frame. This one-piece frameless door jamb is made custom to perfectly suit your wall thickness for a flush finish. The premium design of the EzyJamb SRC provides a smooth transition from one side of the door jamb allowing a minimalistic sophistication in apartments, homes and commercial buildings.




Product Details

EZYJAMB SRC SINGLE RABBET DOOR FRAME - FOR 1-3/4 (SRc) AND 2-1/4 (SRd) DOORS

Material	18ga Galvanneal		
Min / Max Width	10" / 4' (Single)	20" / 8' (Double)	*(Custom sizes available on request)*
Min / Max Height	24" / 10-0'		*(Custom sizes available on request)*
Wall Throat	3-3/4" - 15" in 1/8" increments		*(Custom sizes available on request)*
Fire Rating	Up to 90 minutes		

Hinge Options


1. Concealed Hinges
2. Mortise Hinges
3. Pivot Hinges

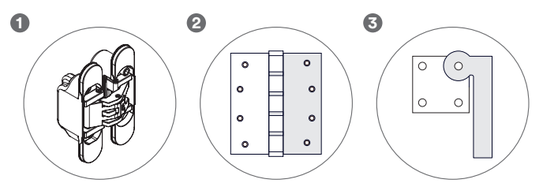

ⓘ Continuous Hinges also available upon request.


Preparation Options

SRc | 1-3/4"



Strike Options	T-Strike ASA Strike DeadBolt PLS 24 FlushBolt NoHa	HES 8300 / 8500 / 1006 Rim Reinforcement Full Lip Roller Concealed Vertical Rod Surface Vertical Rod T Strike Roller Latch (Short Lip)	**Pivot Options**	RocYork 3/4" Offset Pivot Rixson 3/4" Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 0180 ABH Intermediate Pivot 019	
Hinge Options	4-1/2" Standard Weight Mortise Hinge RocYork RYST-60 / RYST-80 / RYST-120 Tectus 340 / 540 / 526 / 527 SOSS 218 / 418 Continuous Hinge		**Closer Options**	RocYork Concealed Closer RocYork Surface Closer Dorma ITS96 PA Reinforcement LCN 2030 LCN 3130	
Power Switch	EPT Power Transfer Door Position Switch		**Holders and Stops**	GJ 100 & 400 Series Rixson 1 & 2 Series Rockwood 100 & 200 Series ABH1000 & 4000 Series	
Misc.	RocYork Touch Latch				

SRd | 2-1/4"



Strike Options	T-Strike ASA Strike DeadBolt NoHa PLS 24 FlushBolt	HES 8300 / 8500 / 1006 Rim Reinforcement Full Lip Roller Concealed Vertical Rod Surface Vertical Rod T Strike Roller Latch (Short Lip)	**Pivot Options**	RocYork 3/4" Offset Pivot Rixson 3/4" Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 0180 ABH Intermediate Pivot 019	
Hinge Options	4-1/2" Standard Weight Mortise Hinge RocYork RYST-60 / RYST-80 / RYST-120 Tectus 340 / 540 / 526 / 527 Continuous Hinge		**Closer Options**	RocYork Concealed Closer RocYork Surface Closer Dorma ITS96 PA Reinforcement LCN 2030 LCN 3130	
Misc.	RocYork Touch Latch EPT Power Transfer Door Position Switch		**Holders and Stops**	GJ 100 & 400 Series Rixson 1 & 2 Series Rockwood 100 & 200 Series ABH1000 & 4000 Series	

Specification Details

- Frame Type
- Door Thickness
- Frame Width
- Frame Height
- Finished Wall Thickness
- Fire Rating
- Strike Type
- Strike Height
- Frame Handing
- Hinge Type
- Hinge Quantity

EX. SRc - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RYST80 - 3

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, Cased Openings, CavKit and SlideSet orders. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.


Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.

Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer lead times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

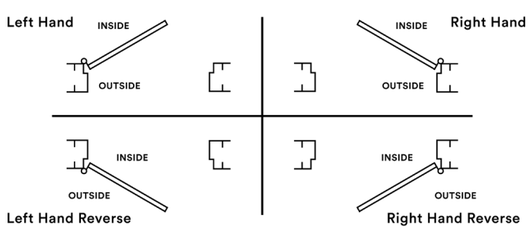

ⓘ Hand all doors by standing outside and facing the door.

Installation Instructions


Step 1


Refer to Rough Opening guide (pages 22, 23)

Ensure that the **stud opening** is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.

When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.




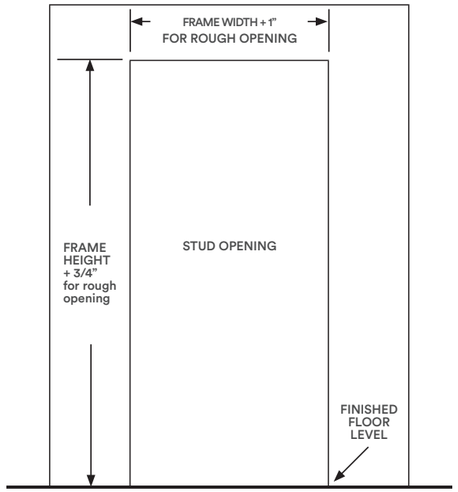


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb with #8 drywall screws. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail 'D'*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail 'E'*.

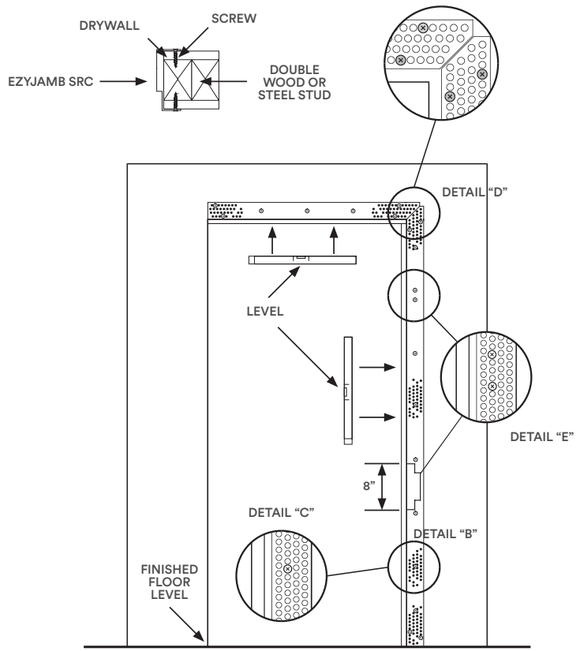

Step 2A | Head Installation



Locate fixing tabs to header.




Corner Detail Completed

Installation Instructions

Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.


Install door prior to mudding to ensure proper tolerances, then disassemble and reinstall after mudding.

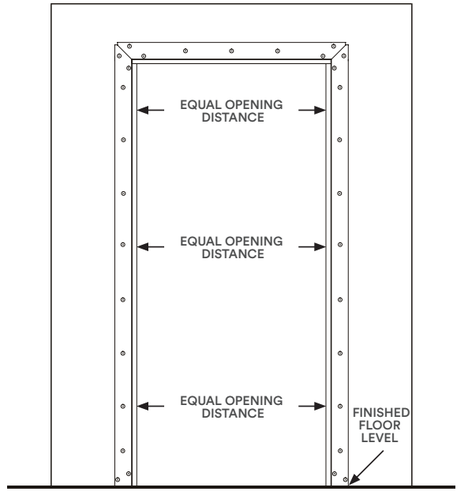


Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.



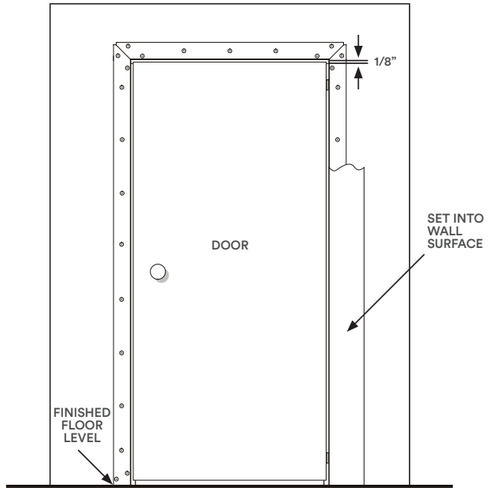

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

https://ezconcept.com.au/resources/installation-instructions/









EzyJamb

DRC | Double Rabbet Door Frame

The latest innovation in EzyJamb Flush Finish Door Jambs, the Double Rabbet EzyJamb – DRC allows for single or double doors to be hung in the fire-rated Jamb creating a modern look for interconnecting hotel rooms.

This modern approach to hotel door jambs complements discerning hotel interiors where a premium finish is required in all areas.




Product Details

EZYJAMB DRC DOUBLE RABBET DOOR FRAME - FOR 1-3/4 (DRc) AND 2-1/4 (DRd) DOORS

Material	18ga Galvanneal		
Min / Max Width	10" / 4' (Single)	20" / 8' (Double)	*(Custom sizes available on request)*
Min / Max Height	24" / 10-0'		*(Custom sizes available on request)*
Wall Throat	4-1/2" - 15" in 1/8" increments (For 1-3/4 Doors) 5-1/2" - 15" in 1/8" increments (For 2-1/4 Doors)		*(Custom sizes available on request)*
Fire Rating	Up to 90 minutes		

Hinge Options


1. Concealed Hinges
2. Mortise Hinges
3. Pivot Hinges

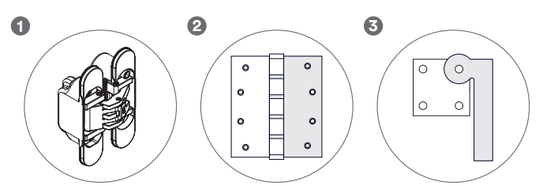

ⓘ Continuous Hinges also available upon request.


Preparation Options

DRc | 1-3/4"



Strike Options	T-Strike ASA Strike DeadBolt HES 8300 / 8500 / 1006	Rim Reinforcement NoHa FlushBolt PLS 24 Full Lip Roller	**Pivot Options**	RocYork 3/4" Offset Pivot Rixson 3/4" Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 0180 ABH Intermediate Pivot 019	
Hinge Options	4-1/2" Standard Weight Mortise Hinge RocYork RYST-60 / RYST-80 / RYST-120 Tectus 340 / 527 / 540 SOSS 218 / 418 Continuous Hinge		**Closer Options**	RocYork Concealed Closer RocYork Surface Closer LCN 3130 Dorma ITS96 PA Reinforcement	
Misc.	RocYork Touch Latch EPT Power Transfer Door Position Switch		**Holders and Stops**	GJ 100 & 400 Series Rixson 1 & 2 Series Rockwood 100 & 200 Series ABH1000 & 4000 Series	

DRd | 2-1/4"



Strike Options	T-Strike ASA Strike DeadBolt HES 8300 / 8500 / 1006 T Strike Roller Latch (Short Lip)	Rim Reinforcement NoHa FlushBolt PLS 24 Full Lip Roller	**Pivot Options**	RocYork 3/4" Offset Pivot Rixson 3/4" Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 0180 ABH Intermediate Pivot 019	
Hinge Options	4-1/2" Standard Weight Mortise Hinge RocYork RYST-60 / RYST-80 / RYST-120 Tectus 340 / 527 / 540 Continuous Hinge		**Closer Options**	RocYork Concealed Closer RocYork Surface Closer LCN 3130 Dorma ITS96 PA Reinforcement	
Misc.	RocYork Touch Latch EPT Power Transfer Door Position Switch		**Holders and Stops**	GJ 100 & 400 Series Rixson 1 & 2 Series Rockwood 100 & 200 Series ABH1000 & 4000 Series	

Specification Details

- Frame Type
- Door Thickness
- Frame Width
- Frame Height
- Finished Wall Thickness
- Fire Rating
- Strike Type
- Strike Height
- Frame Handing
- Hinge Type
- Hinge Quantity

EX . DRc - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RYST80 - 3

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, Cased Openings, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.


Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.

Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer lead times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

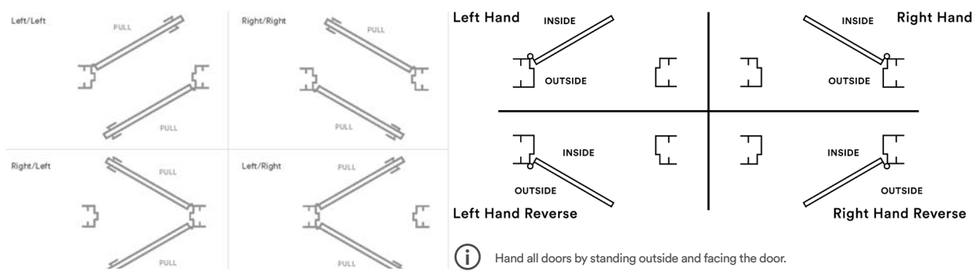

ⓘ Hand all doors by standing outside and facing the door.

Installation Instructions


Step 1


Refer to Rough Opening guide (pages 16, 17)

Ensure that the **stud opening** is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.

When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.




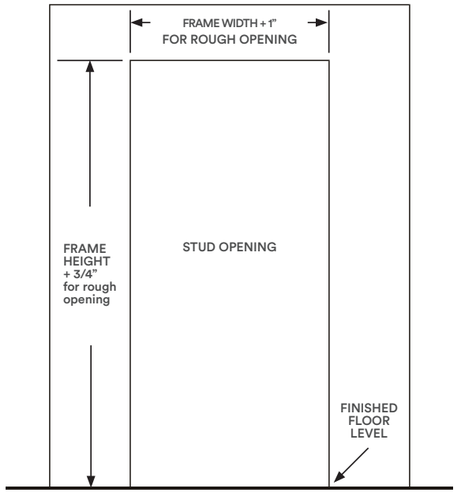


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb with #8 drywall screws. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail D*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.



Step 2A | Head Installation



Locate fixing tabs to header.



Corner Detail Completed


EzyJamb | DRC Double Rabbet Door Frame

Installation Instructions

Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.


Install door prior to mudding to ensure proper tolerances, then disassemble and reinstall after mudding.

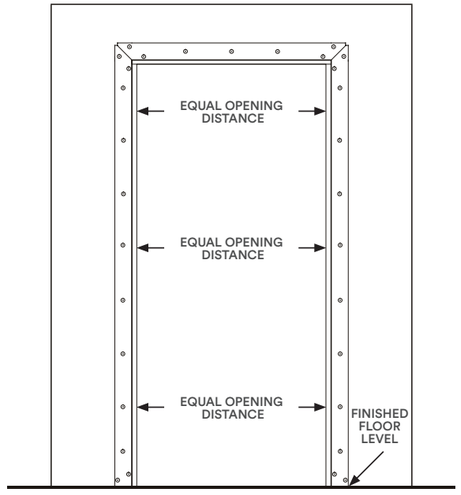


Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

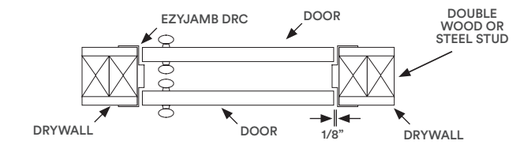

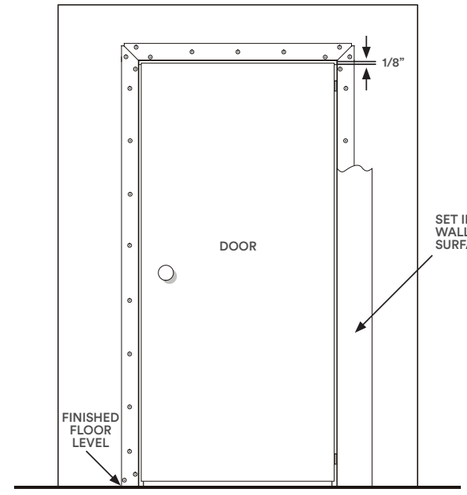

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

https://ezconcept.com.au/resources/installation-instructions/









EzyJamb

EZC | Classic Adjust Door Frame


EzyJamb® Classic Adjust - EZC is a split type door jamb system that creates inconspicuous clean lines to complete the contemporary look of architectural spaces. The two-piece jamb is made specific to your wall throat, yet has 3/8" +/- field adjustments to allow for inconsistencies at install.



Product Details


EZYJAMB EZC CLASSIC ADJUST DOOR FRAME FOR 1-3/8 (EZa) AND 1-3/4 (EZc) DOORS

Material	20ga Galvanneal	
Min / Max Width	10" / 3'-0" (Single) 20" / 6-0' (Double)	*(Custom sizes available on request)*
Min / Max Height	24" / 8-0'	*(Custom sizes available on request)*
Wall Throat	3-1/2" - 8-7/8"	*(Custom sizes available on request)*
Fire Rating	90 minutes - Up to 3080 single, 6080 double	*(EZa | 1-3/8" is not Fire Rated)*
Hinge Options	1 Concealed Hinges 2 Mortise Hinges 3 Non-Mortise Hinges	

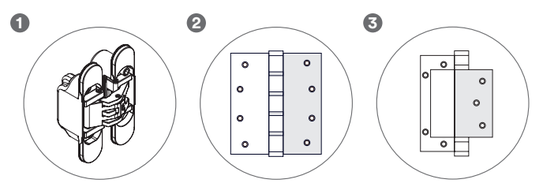


Preparation Options

EZa | 1-3/8"

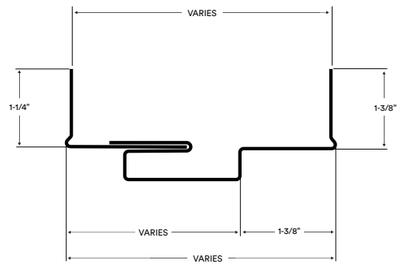

Strike Options	T-Strike DeadBolt PLS 24
Hinge Options	Non-Mortise Hinge RYST-60
Misc.	RocYork Touch Latch

EZc | 1-3/4"

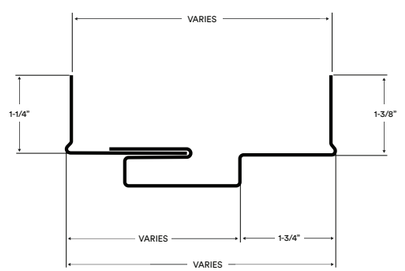

Strike Options	T-Strike ASA Strike DeadBolt Rim Reinforcement	NoHa Flushbolt PLS 24 T Strike Roller Latch (Short Lip)
Hinge Options	Non-Mortise Hinge 4" Standard Weight Mortise Hinge RYST-60 / RYST-80 Tectus 340 SOSS 216 /416	
Closer Options	RocYork Surface Closer PA Reinforcement Surface OH Stop	
Misc.	RocYork Touch Latch	

Specification Details

- Frame Type
- Door Thickness
- Frame Width
- Frame Height
- Finished Wall Thickness
- Fire Rating
- Strike Type
- Strike Height
- Frame Handing
- Hinge Type
- Hinge Quantity

EX . EZc - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RYST80 - 3

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.


Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, Cased Openings, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer lead times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

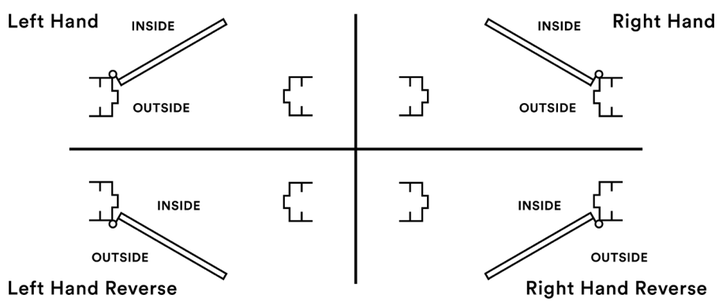

Hand all doors by standing outside and facing the door.

Installation Instructions


Step 1


Refer to Rough Opening guide (pages 22, 23)

Ensure that the **stud opening** is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.

When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

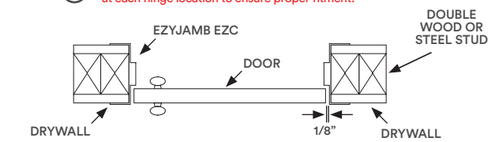


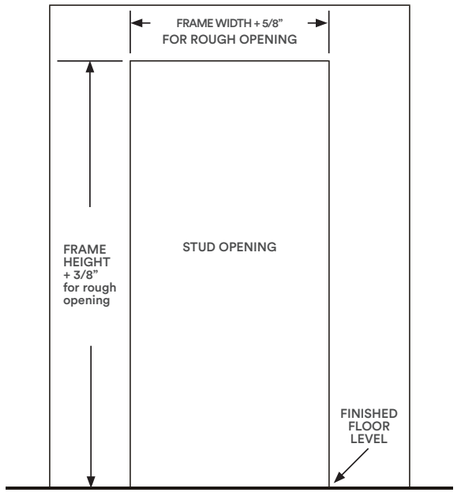


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb with #8 drywall screws. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail 'D'* and beside hinge position - both above and below hinge if using concealed hinges as *Detail 'E'*.

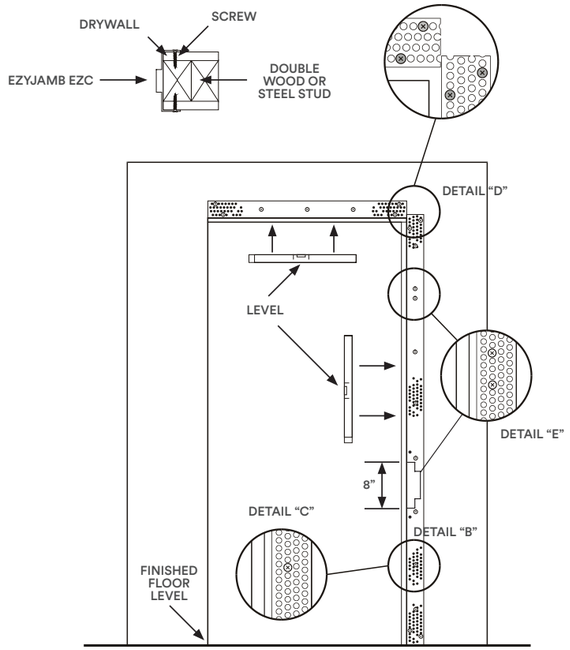


Step 2A | Head Installation

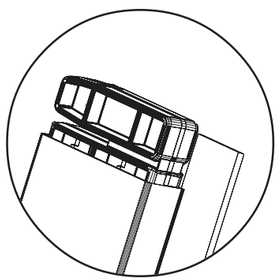

Head joiners as inserted in jamb.

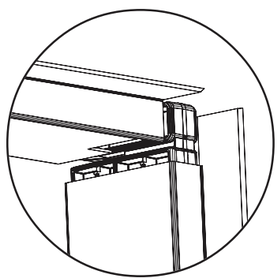

Locate head into joiner and make flush with jamb so the head joiner is not seen.

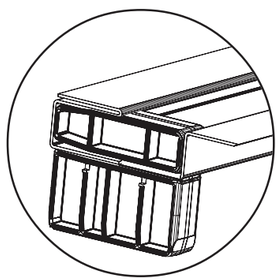


Remove the remaining head joiner out of the strike jamb into the end of the head (as shown) to receive the strike jamb.

Installation Instructions

Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

Install door prior to mudding to ensure proper tolerances, then disassemble and reinstall after mudding.

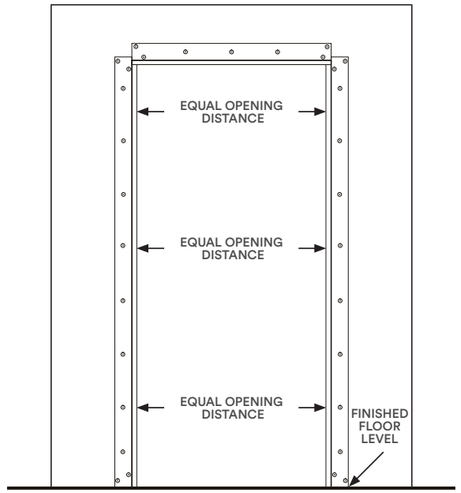



Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

All the corners must be paper taped and mudded in as Detail 'F'.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

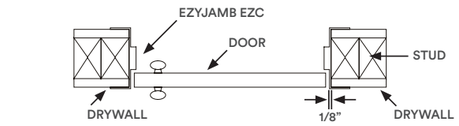

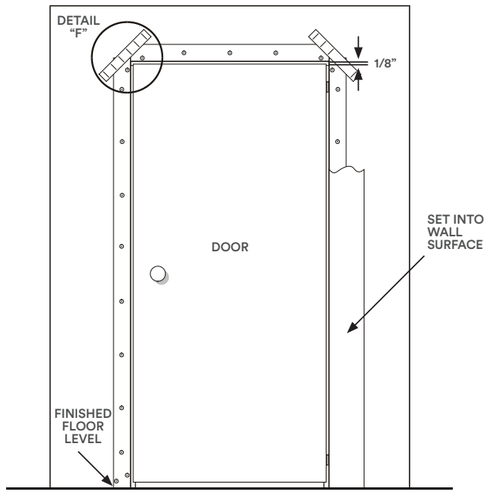

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

https://ezconcept.com.au/resources/installation-instructions/








Rough Openings


ISD | Inswing



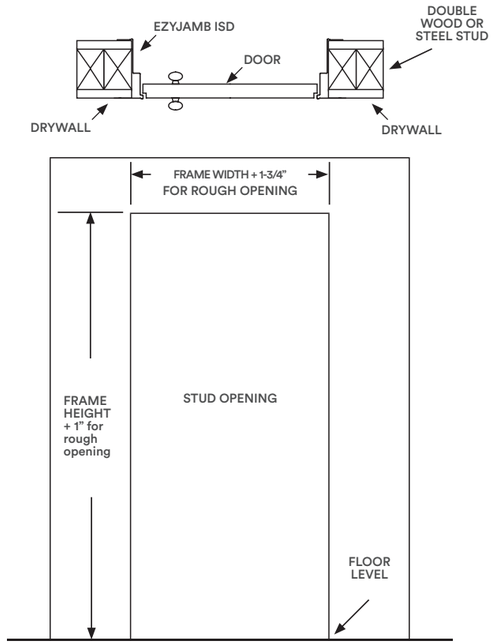

SRC | Single Rabbet




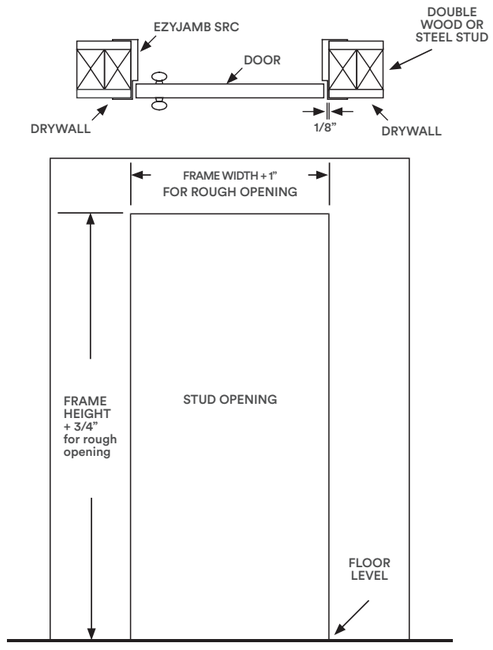

Rough Openings


EZC | Classic Adjust



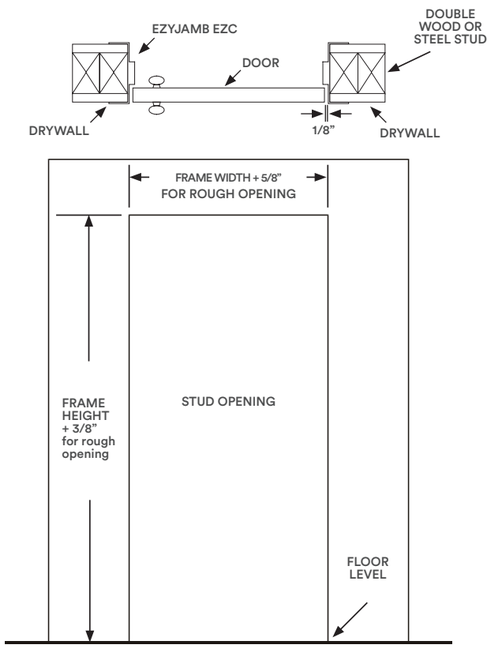

DRC | Double Rabbet



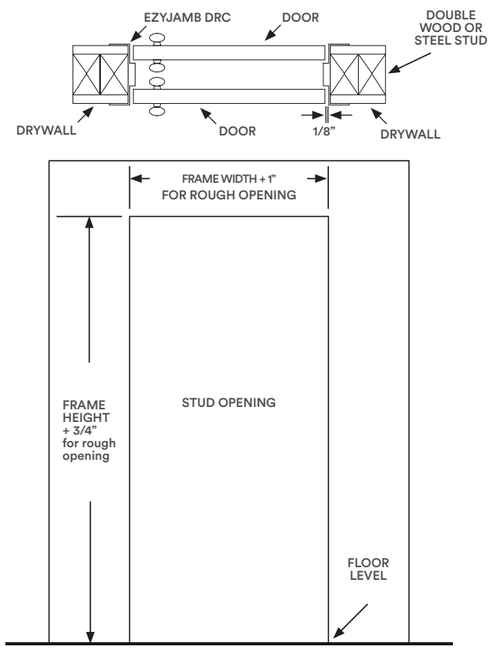

When using RocYork Concealed Hinges, the stud must be **notched** at each hinge location to ensure proper fitment. Applies to all profiles.



Cased Openings

Trimless Framed Doorways

Remove trims from internal cased openings for an uninterrupted transition between rooms where a door is not required. Provides the required strength for stability and durability in high traffic areas.

Cased Opening Features

- Galvanneal finish ready to be primed and painted with the rest of the wall or available with powder coating.
- Fixing Tab and Slot system for seamless connection.



Product Details

CASED OPENING FRAME		
Material	18ga Galvanneal	
Min / Max Width	10" / 10'0"	
Min / Max Height	20" / 10'0"	
Wall Throat	3-3/4" - 15"	*(in 1/8" increments)*
Fire Rating	Non-fire rated	

ⓘ Requires additional prep work after purchase


Specification Details


Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, Cased Openings, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

Rough Openings

ⓘ Double studs may be required in custom applications. Contact the EZ Concept team for more information.

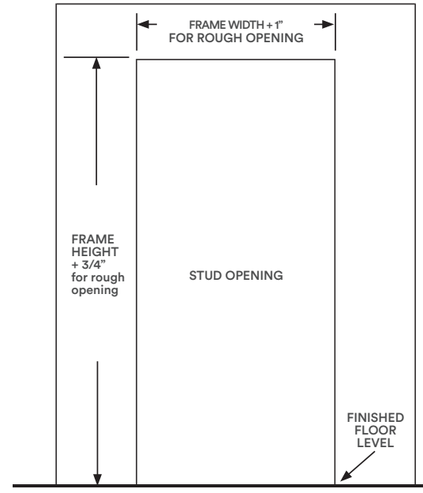

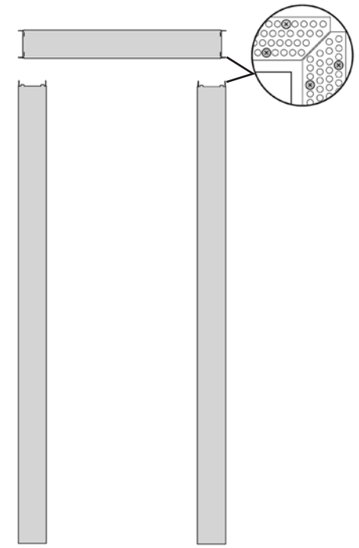





SlideSet

The Flush Finish Pocket Door Solution

The SlideSet Pocket Door System has been designed to provide the absolute minimum of detail, giving the ability to completely conceal the door and give the impression that the door does not exist when open, and complete privacy when closed, adding a contemporary and architectural dimension to any project.

SlideSet Features


- Hardware concealed in door providing minimum gap between door/track
- Mounting plates allow for 'lift-up' installation
- Stoppers with retention device installed inside track will retain door
- Ball bearing high quality rollers and aluminium track allows for smooth simple opening and closing operation.
- Available for Standard Height and Full Height pocket doors.
- Suitable for pairing with 1-3/8", 1-3/4", and 2-1/4" EzyDor door thickness profiles.
- Soft open/close compatible.
- Pairs with CavKit Trims (see page 24) to create a fully flush pocket door system, each sold separately.


Product Details


EZ CONCEPT POCKET DOOR SYSTEM


Door Height	6'8" - 9' 9-1/8"	*(Custom sizes available on request)*
Door Widths	2' 0" to 4' 0" Single or 4' 0" to 8' 0" double	*(Single & Double available)*
Door Thickness	1-3/8", 1-3/4", 2-1/4"	*(Custom sizes available on request)*
Door Weights	176/264lbs	
Wall Stud Options	3-1/2", 3-5/8", 5-1/2", 6"	
Head Options	Standard	*(See Cavkit Head Detail)*
Fire Rating	Non-fire rated	


Product Details

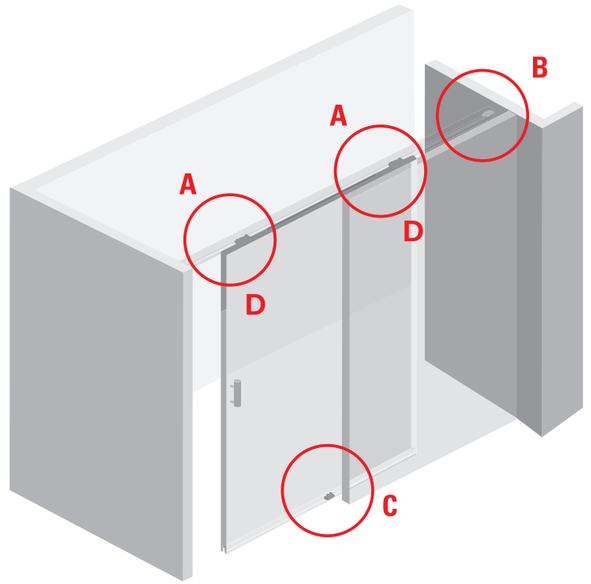









1 / A	Track
2 / A	Carrier Assembly
2 / B	Stopper with Retention
1 / C	Floor Guide
2 / D	Door Mounting Plates
1 / E	Pocket Door Assembly
1 / F	CavKit Trim
1	Screws for Assembly
1	Adjustment Tool

Options




Ez-Soft avoids from bumping and gentle door opening/closing.



Complete the kit by selecting a solid core paint grade door prepared for the SlideSet assembly.



No-Ha invisible handles create a concealed flush finish, for a complete minimalist package.

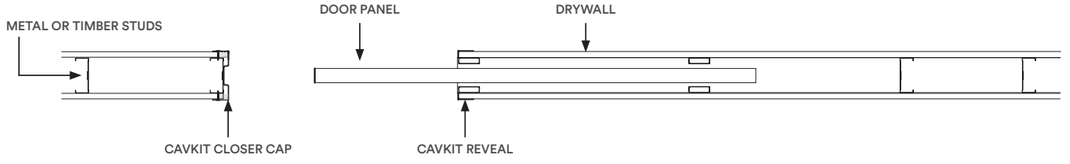

Specification Details


- Stud Size - Drywall - Frame Width - Frame Height - Door Thickness - Soft Stop

EX . 3-5/8" - 5/8" - 3'-0" - 8'-0" - 1-3/4" - Y/N

Installation Instructions

Step 1

Identify the desired width and height of the door.



Step 2

Prepare door for concealed carriers.



Step 5

Insert assembly into rough opening. Level, plum, shim, fasten.




Step 6

Insert floor guide.




Step 9

Hang drywall.

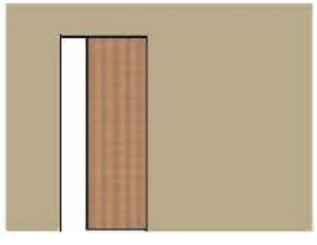

Step 10

Install Closer Cap.

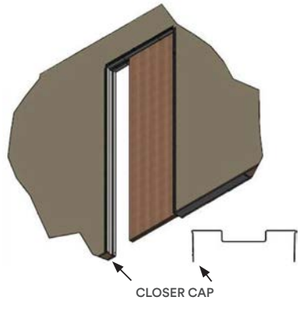


SlideSet | SlideSet Pocket Door Assembly

Installation Instructions

Step 3

Prepare rough opening.

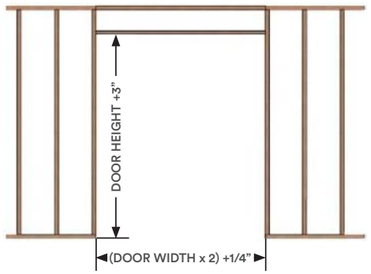


Step 4

Fasten Track to Split Stud Wall Assembly.




Step 7

A. Insert rear stop and slide to rear.
B. Insert rear carrier and slide to middle.
C. Insert front carrier.

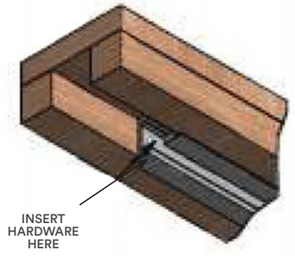


Step 8

A. Hang door and slide into pocket.
B. Insert front stop and slide to the rear a few inches.
C. Place filler track in gap and fix to the assembly.
D. Adjust and secure stops.

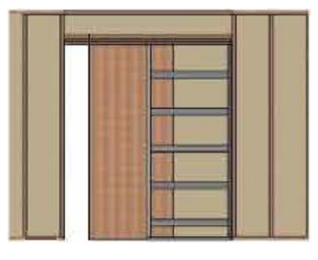


Step 11

Install Reveal.

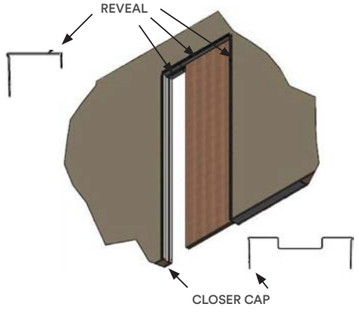

Step 12

Tape and mud. Prime and paint.

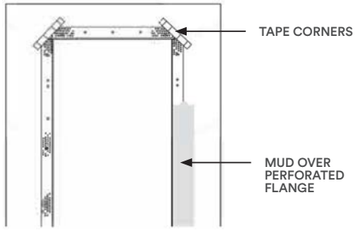



CavKit

Trims to suit pocket doors

CavKit is a flush finish that trims and caps the drywall edges around the door penetration, to create a pocket door that can be hidden when open and provide privacy when closed, without the look of bulky trims.

Designed to perfectly match complementary EZ Concept systems, the CavKit pocket door trim system allows you to create a consistent flush look across all of your interior doors. Create the ultimate in modern pocket doors when paired with flush pull and lock systems.

Creating a minimalist pocket door befitting of a modern interior applies to both Standard and Full Height openings. The height of the CavKit can be made-to-order to suit specified room height.

Pairs with SlideSet Pocket Door System (see page 20) to create a fully flush pocket door system, each sold separately.



Product Details


CAVKIT FLUSH FINISH POCKET DOOR TRIM KIT		ITEMS INCLUDED IN KIT
Door Widths	Up to 4-0" single or 8-0" pair	*2x J bend EzyReveal to Suit Width*
Door Height	Up to 9' 9-1/8"	1x Closer Cap or EzyCap to Suit Height 2x EzyReveal to Suit Height
Door Thickness	1-3/8", 1-3/4", 2-1/4"	
Finished Wall Thickness	4-1/2" - 12"	

ⓘ Door and hardware sold separately.


ⓘ Flush hardware recommended for locks and pulls.

Installation Details


CavKit | Head Detail
EzyReveal
Flush Finish to Drywall

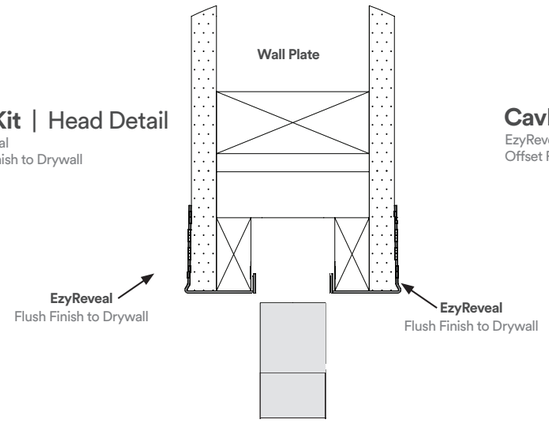


CavKit | Head Detail
EzyReveal
Offset Flush Finish to Drywall

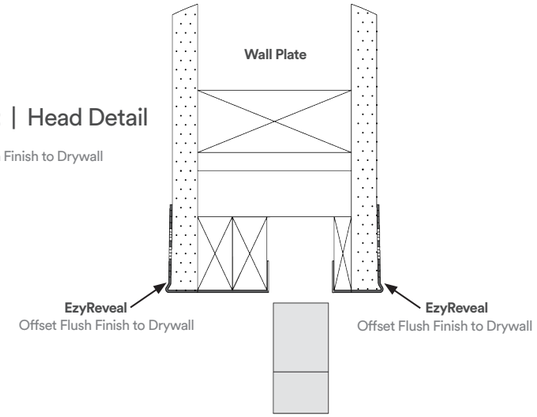


CavKit - Closer Cap | Plan View
CavKit with Closer Cap as Standard

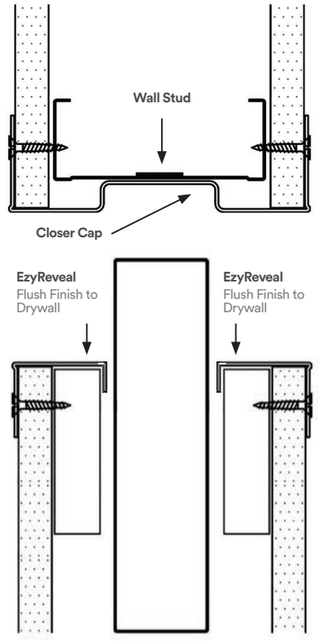

CavKit - Closer Cap | Plan View
CavKit with Offset Cap

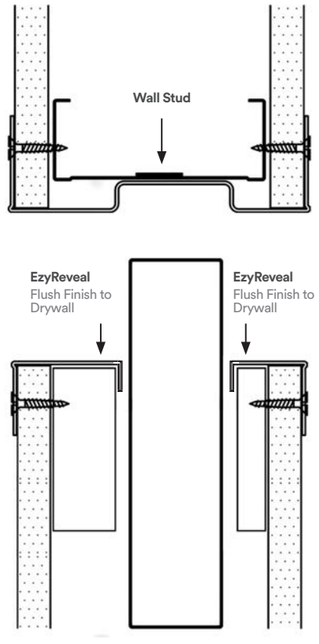

CavKit - EzyCap | Plan View
CavKit with EzyCap upon request

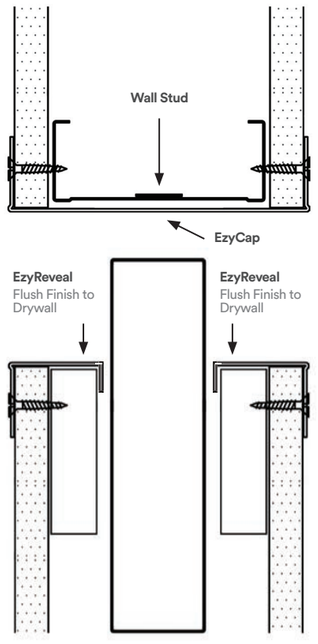



Standard Closer Cap



Offset Closer Cap



Optional EzyCap



EzyDor

Solid Core Flush Door

EZ Concept® offers solid core wood flush doors in primed paint grade and finish-sanded stain grade applications. EzyDor is an excellent choice to pair with your minimalistic frames for a premium architectural finish. Ask about our custom sizing, fire rating, and door prepping capabilities!

EZ Concept can supply your project with the complete flush door system, including EzyJamb® door frames, RocYork® hinges and levers, and our stock or custom line of EzyDor solid core doors..

SlideSet Pocket doors also pair with EzyDor™ for a finish defined by clean edges and flush design.



Product Features

- Pre-fit Solid Core Flush Hardboard doors.
- Available in Primed Paint Grade or Finish-Sanded Stain Grade.
- Hinge and lock preps machined to match frames.
- Fire-Rated door available, up to 90 minutes.
- Seamlessly integrates with EzyJamb for swing doors and SlideSet for pocket doors.
- 2-1/2" Stile and rails for added durability, ease of trimming and hardware preparations.

Door Preparation

- Hinge and lock preps machined to match frames.
- Ability to machine doors to match ISD door frame prep.
- Ability to machine doors to match NoHa prep.
- Preparation for all doors includes a coating for a primed and ready-to-paint finish.

Veneer Cuts & Wood Options

Standard Veneer Cut	Plain Sliced, Rotary, Rift Cut, Quarter
Popular Wood Types*	White Oak, Red Oak, Walnut, African Mahogany, Sapele, Cherry, Ash, Natural Birch, White Birch, Maple

*Additional wood options available upon request.

Product Details

EZ Concept offers a wood door stocking program for more competitive lead times. The sizes below apply only to our Primed Solid Core Flush Doors. EZ Concept also offers custom sized and stain grade wood doors, tailored to each individual order at slightly longer lead time.

EZYDOR - 1-3/4" THICK DOOR

Material	Solid Particle Core Hardboard - Paint Grade
Door Thickness	1-3/4"
Door Stock Heights	6' 8" 7' 0" 8' 0"
Door Stock Widths	1' 6" 1' 8" 2' 0" 2' 2" 2' 4" 2' 6" 2' 8" 2' 10" 3' 0"

EZYDOR - 2-1/4" THICK DOOR

Material	Solid Particle Core Hardboard - Paint Grade
Door Thickness	2-1/4"
Door Stock Heights	7' 0" 8' 0"
Door Stock Widths	2' 6" 2' 8" 3' 0"

ⓘ Both door thickness profiles are also suitable for double door applications.

ⓘ Both door thickness profiles are suitable for pairing with SlideSet pocket doors.

Completed Installation

The door is flush finished and prepped to achieve a complete minimalist door. This is possible with both swing and pocket doors. See completed installations of EzyDor with both the EzyJamb and SlideSet opening systems.

For both systems, Full Height doors can be fitted to form floor-to-ceiling openings specified to the custom height of the project:

EzyJamb

Door Frames





SlideSet

Pocket Doors





More Information

For further information or assistance in installation of EZ Concept products, please visit:

https://ezconcept.com.au/resources/installation-instructions/



RocYork

Door Hardware

The RocYork Hardware range of inconspicuous hinges and handles elevates contemporary designs. Comprised of mild steel, each piece is engineered for durability. The comprehensive range is designed to seamlessly integrate with EzyJamb, EzyDor, and SlideSet openings, brought to you by EZ Concept.

Concealed Hinges

Fluid architectural detailing sometimes means removing the details.

Concealed Hinges utilise an inset barrel and pin for a finish that is invisible in a closed door. The result is a fine line perimeter uncluttered by hardware and fitting of a lush contemporary space. Aesthetic form meets endurance as the hinge is designed to withstand high usage and slamming over extended periods.




Invisible Barrel & Pin

The barrel sits inside the door whilst the hinge collapses inside the hinge body upon closure.



Low Profile Hinge Covers

Sleek covering to hide the inner workings of the hinge for a subtle visual finish.



Maintenance Free

Constructed with a bearing mechanism that required no maintenance.



Three Axis Adjustability

Find the perfect fit with ease as the hinge features three points of adjustability easily maneuvered with an allen key. This allows for adjustability of the height of the door, the width of the clearance between the door and jamb, and the depth of the door position.

Concealed Hinges



RocYork RYST-60

HW-AS-RYST60

Door Thicknesses	1-3/8" - 1-3/4"
Adjustments	X: Horizontal +3 / -2 Y: Depth +1 / -1 Z: Vertical +2.5 / -2.5
Capacity[1]	132 lbs - 2 hinge application
Finishing	Satin Chrome Polished Chrome Satin Nickel Black White Satin Brass
Fire Rating	UL 20 Minutes[2]



RocYork RYST-60F

HW-AS-RYST60F

Door Thicknesses	1-3/8" - 1-3/4"
Adjustments	X: Horizontal +3 / -2 Y: Depth +1 / -1 Z: Vertical +2.5 / -2.5
Capacity[1]	132 lbs - 2 hinge application
Finishing	Satin Chrome Polished Chrome Satin Nickel Black White Satin Brass
Fire Rating	UL 90 Minutes[3]



RocYork RYST-80

HW-AS-RYST80

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -2 Y: Depth +1 / -1 Z: Vertical +3 / -3
Capacity[1]	176 lbs - 2 hinge application
Finishing	Satin Chrome Satin Nickel White Black Satin Brass
Fire Rating	UL 20 Minutes[2]



RocYork RYST-80F

HW-AS-RYST80F

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -2 Y: Depth +1 / -1 Z: Vertical +3 / -3
Capacity[1]	176 lbs - 2 hinge application
Finishing	Satin Chrome Satin Nickel White Black Satin Brass
Fire Rating	UL 90 Minutes[3]



RocYork RYST-120

HW-AS-RYST120

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -3 Y: Depth +3 / -2 Z: Vertical +1 / -1
Capacity[1]	264 lbs - 2 hinge application
Finishing	Satin Chrome Satin Nickel Black Satin Brass
Fire Rating	UL 20 Minutes[2]



RocYork RYST-120F

HW-AS-RYST120F

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -3 Y: Depth +3 / -2 Z: Vertical +1 / -1
Capacity[1]	264 lbs - 2 hinge application
Finishing	Satin Chrome Satin Nickel Black Satin Brass
Fire Rating	UL 90 Minutes[3]

1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.

2 Tested in the US by UL in accordance with ANSI/UL 10C Fire Test of Door Assemblies.

3 Intertek Certification in accordance with UL 10C (R2021), NFPA 252 (R2022), and CAN/ULC S104 (R2020).

Concealed Hinges



RocYork RYWT-100

HW-AS-RYWT100

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -3 Y: Depth +1 / -1 Z: Vertical +3 / +3
Capacity[1]	220.46 lbs - 2 hinge application
Finishing	Satin Chrome
Clearance	8mm / 5/16"



RocYork RYWT-160

HW-AS-RYWT160

Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3 / -3 Y: Depth +1 / -1 Z: Vertical +3 / -3
Capacity[1]	352.74 lbs - 2 hinge application
Finishing	Satin Chrome
Clearance	8mm / 5/16"

The body of the hinge will be visible on the face of the door. Cladding or panelling is highly recommended if these hinges are being used. Discuss cladding options with the EZ Concept team.


Cladding Installations with Concealed Hinges

Truly hidden doors are now achievable with the RocYork range. The clean lines of an EzyJamb installation can now pair with cladding by integrating RocYork Wide Throw Hinges, to fully conceal the door into the wall. These hinges provide a broader swing radius and capacity for openings where cladding is included. They complement the clean, modern aesthetics offered by other concealed hinges with the added benefit of heavy-duty functionality.

The body of the hinge will be visible on the face of the door. Cladding or panelling is highly recommended if these hinges are being used. Discuss cladding options with the EZ Concept team.



Hinge not centered on the door leaf

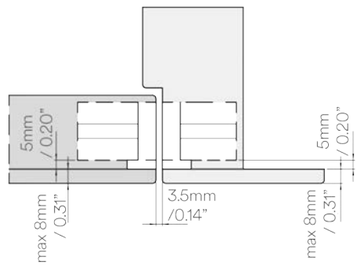

Offset Pivot Hinges



RocYork 3/4" Offset Pivot Set

HW-AS-RYOP34SS

Cladding Thickness	Up to 3/4"
Door Weight	150kg / 330lbs
Door Opening	180°
Finishing	Stainless Steel
Max Door Height	8'0"
Metal Thickness	1/2" thickness

Mortised Hinges



4-1/2" x 4" Hinge

Hinge: HW-AS-RY4124SS

Door Thickness	1 3/4"
Version	4-1/2" x 4" Mortised Hinge
Material Gauge	.134
Finishing	Satin Stainless Steel 630 Black Finish
Fire Rating	90 Minutes



4" x 3-1/2" Hinge

Hinge: HW-AS-RY4312SS

Door Thickness	1 3/4"
Version	4" x 3-1/2" Mortised Hinge
Material Gauge	.134
Finishing	Satin Stainless Steel 630 Black Finish
Fire Rating	90 Minutes

Non-Mortised Hinges



4" x 3" Hinge

Hinge: HW-AS-RYA4

Door Thickness	1 3/8" Door
Version	4" x 3" Ball Bearing Hinge
Material Gauge	.134
Finishing	Satin Stainless Steel 630 Satin Chrome 626 Oil Rubbed Bronze 613



4" x 3 1/2" Hinge

Hinge: HW-AS-RYC4

Door Thickness	1-3/4"
Version	4" x 3 1/2" Ball Bearing Hinge
Material Gauge	.134
Finishing	Satin Stainless Steel 630 Satin Chrome 626 Polished Chrome 625 Oil Rubbed Bronze 613
Fire Rating	90 Minutes

Spring Hinges



Spring Non-Mortised 4" x 4" Hinge

Hinge: HW-AS-RYC4SSS9

Door Thickness	1 3/4" Door
Version	4" x 4" Ball Bearing Hinge
Material Gauge	.134
Finishing	Stainless Steel 630



Spring Mortised 4 1/2" x 4 1/2" Hinge

Hinge: HW-RY412SPSS


Door Thickness	1 3/4" Door
Version	4 1/2" x 4 1/2" Ball Bearing Hinge
Material Gauge	.134
Finishing	Stainless Steel 630

Installation Tools



RocYork Router Jig (wood)

Item Number	Product
HW-RGN060S	RY60 Nail on Single Router Guide
HW-RGC060S	RY60 Clamp on Single Router Guide
HW-RGCOST80S	RYST80 Clamp on Single Router Guide
HW-RGCOST120S	RYST120 Clamp on Single Router Guide



RocYork NoHa Milling Tool


Item Number	HW-NOHA-Milling Tool
Product	Mill Cutter for Noha Door Cavity

QuickShip PROGRAM

Frames and doors dispatched within 48 hours!

Standard EzyJamb terms and conditions apply to QuickShip orders.
Quantity restrictions may apply.


Classic Adjust | EZC

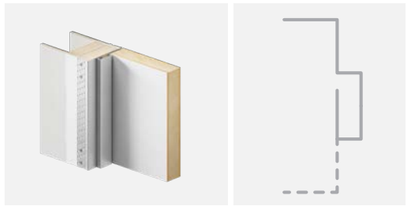

Door Thickness	Frame Size	Wall	Strike Type	Strike Height	Hinge	Hinge Qty
1-3/4"	2'-6" x 6'-8"	4-7/8"	T-Strike	38"	RYST-60	3
1-3/4"	2'-8" x 6'-8"	4-7/8"	T-Strike	38"	RYST-60	3
1-3/4"	3'-0" x 6'-8"	4-7/8"	T-Strike	38"	RYST-60	3
1-3/4"	2'-6" x 7'-0"	4-7/8"	T-Strike	38"	RYST-60	3
1-3/4"	2'-8" x 7'-0"	4-7/8"	T-Strike	38"	RYST-60	3
1-3/4"	3'-0" x 7'-0"	4-7/8"	T-Strike	38"	RYST-60	3

EZC QuickShip frames include frame, hinges, strike, dust box.
EZC QuickShip frames available for different wall thicknesses - please inquire.
Various hinge finishes available. Hinge finishes vary between models.

Single Rabbet | SRC

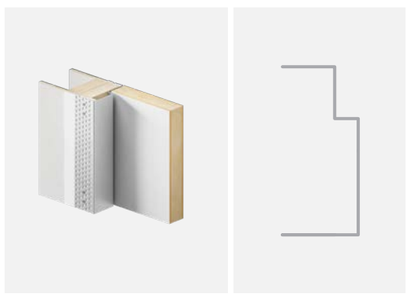

Door Thickness	Frame Size	Wall	Strike Type	Strike Height	Hinge	Hinge Qty
1-3/4"	2'-6" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
1-3/4"	2'-8" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
1-3/4"	3'-0" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
1-3/4"	2'-6" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-80	3
1-3/4"	2'-8" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-80	3
1-3/4"	3'-0" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-80	3
1-3/4"	2'-6" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
1-3/4"	2'-8" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
1-3/4"	3'-0" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
1-3/4"	2'-6" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
1-3/4"	2'-8" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
1-3/4"	3'-0" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3

SRC QuickShip frames include frame, hinges, strike, dust box, closer reinforcement.
SRC QuickShip frames available with fire rating - please inquire.
Various hinge finishes available. Hinge finishes vary between models.

Inswing Door | ISD



Door Thickness	Frame Size	Wall	Strike Type	Strike Height	Hinge	Hinge Qty
2-1/4"	2'-6" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
2-1/4"	2'-8" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
2-1/4"	3'-0" x 7'-0"	4-7/8"	ASA Strike	38"	RY4124	3
2-1/4"	2'-6" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
2-1/4"	2'-8" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
2-1/4"	3'-0" x 7'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
2-1/4"	2'-6" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
2-1/4"	2'-8" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
2-1/4"	3'-0" x 8'-0"	4-7/8"	ASA Strike	38"	RY4124	4
2-1/4"	2'-6" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
2-1/4"	2'-8" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3
2-1/4"	3'-0" x 8'-0"	4-7/8"	ASA Strike	38"	RYST-120	3

ISD Quickship frames include frame, hinges, strike, dust box.
Various hinge finishes available. Hinge finishes vary between models.

EzyDor | Solid Core Doors



1-3/4" THICK DOOR


Material	Solid Particle Core Hardboard		
Door Thickness	1-3/4"		
Door Stock Heights	6' 8"	7' 0"	8' 0"
Door Stock Widths	2' 6"	2' 8"	3' 0"

2-1/4" THICK DOOR

Material	Solid Particle Core Hardboard		
Door Thickness	2-1/4"		
Door Stock Heights	7' 0"	8' 0"	
Door Stock Widths	2' 6"	2' 8"	3' 0"

EZ Concept QuickShip range only includes Primed Flush Doors. Fire rated doors not available through QuickShip.


Closers

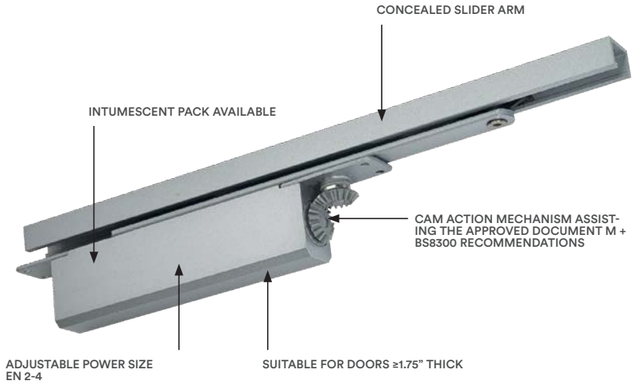


Concealed Slide Arm Closer

HW-RYCC1301100

Max Door Weight	286.6lbs
Min / Max Door Width	23.42" / 43.3"
Opening Angle	110°
Closing Speed	Adjustable
Finishes	Silver Black




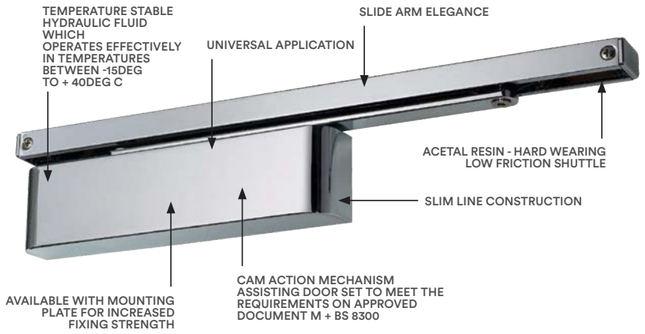

Surface Slide Arm Closer

HW-RYSC60950

Max Door Weight	176lbs
Min / Max Door Width	24" / 44"
Opening Angle	120°
Closing Speed	Adjustable
Finishes	Silver Black



Hardware Accessories



EzyJamb Short Lip T-Strike

HW-RYSSTLP

Strike Plate Size	1-1/8" x 2-3/4"
Finishing	Stainless Steel Black



EzyJamb Short Lip T-Strike

(For Roller Latch) HW-RYSSRLSP

Strike Plate Size	1-1/8" x 2-3/4"
Finishing	Stainless Steel



Concealed Magnetic Catch

HW-DHPLS24PRO-BLK/Silver

Finishing	Black Silver



Concealed HD Magnetic Catch

HW-DHPLS24PROXHD-BLK/Silver

Finishing	Black Silver



EzyJamb Dust Box for EZC

T-STRIKE: HW-RYSBPI | ASA: HW-RYLBPI

Finishing	Black Polyurethane



EzyJamb Short Lip ASA Strike

HW- RYSSASASP

Strike Plate Size	1-1/4" x 4-7/8"
Finishing	Stainless Steel



EzyJamb Door Silencer

HW-RYWDS-10 Pack

Finishing	White



RocYork Touch Latch

HW-DHZTouch Latch

Finishing	Black

NoHa Invisible Handles

Discover the next evolution in door handles.*

Integrating door handle and magnetic lock in one box; RocYork No-Ha 2.0 enables doors to be opened and shut while completely concealing the handle providing the same finish as the door and walls.

**Not ADA Compliant, not Fire Rated*



Profiles



NoHa Slide

For application in sliding doors.



NoHa Swing

For application in swing doors.



NoHa Cabinet

For application in furtinure such as drawers and cupboards.

Features




Interchangable Cover Plate

The cover plate is interchangeable so that it can be made to match the finish of the door panel. Also available in MDF or brushed stainless steel to suit your interior finishing texture.



Security Options

A selection of door knobs and privacy locks can be applied for entries such as bathrooms. The lock is only visible from the inside to maintain the clean finish on the other side.

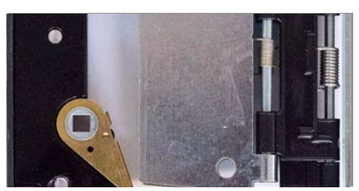


Maintenance Free


Resistant to wear-and-tear and oxidation. High grade composition ensures maintenance is not required over time.

Product Dimensions


Installed Side-View:

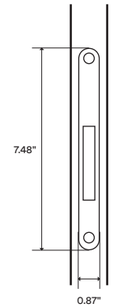

Coverplate Size:



Opening in the door:



Specification Details

Part No.	Variant	Description	Finishing
HW-NOHA-SW-PA-938-S5/SC	Swing	NoHa Lock and Strike - Passage	Satin Chrome
HW-NOHA-SW-PA-938-S5/BK	Swing	NoHa Lock and Strike - Passage	Black
HW-NOHA-SW-PR-937-S5/SC	Swing	NoHa Lock and Strike - Privacy	Satin Chrome
HW-NOHA-SW-PR-937-S5/BK	Swing	NoHa Lock and Strike - Privacy	Black
HW-NOHA-PR-TURN-S012	Swing	Privacy Turn for NM937	Stainless Steel
HW-NOHA-PR-TURN-Black	Swing	Privacy Turn for NM937	Black
HW-NOHA-SL-1-SIDE	Sliding	NoHa Sliding Handle - One Side	
HW-NOHA-SL-2-SIDE	Sliding	NoHa Sliding Handle - Two Side	
HW-NOHA-CB-1-SIDE	Cabinet	NoHa Cabinet Handle - One Side	
HW-NOHA-Coverplate-MDF	Coverplate	Coverplate for all NoHa Series	MDF Prime
HW-NOHA-Coverplate-SS	Coverplate	Coverplate for all NoHa Series	Stainless Steel
HW-NOHA-S5-82 SC	Strike Plate	Short Strike Plate	Satin Chrome
HW-NOHA-S0-190 SC	Strike Plate	Extended Strike Plate	Satin Chrome

Completed Installation

NoHa is the perfect solution for eliminating typical exposed hardware to operate doors. The flush finish final appearance is the perfect way to compliment EZ Concept trimless applications.


For further information or assistance in installation of RocYork products, please visit:

https://ezconcept.com/resources/installation-instructions/




Levers

The line of levers from EZ Concept is designed to complete contemporary spaces. Providing a range of aesthetics curated to a sleek architectural finish. Slimline and more defined models create an option between complementary features and eye-catching designs. A high grade of quality is built upon the materials used in each handle and lock system. All accessories are reliable through heavy usage and require minimal maintenance over time.



DHL127 Lever

A classic design for a slimline finish. Minimalist build is suitable for both residential and commercial application.




DHL138 Lever

An angular finish brings eye catching design to the door opening.



DHL133 Lever

A lightweight and rounded visual handle. Subtle aesthetic provides flexibility in application.

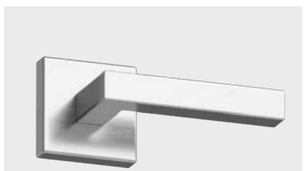

DHL124 Lever

A square finish perfect for modern interior spaces. Popular in commercial spaces.

Locks

A collection of door locking systems that accommodate to a variety of security requirements and finished looks.
Options cover Entry, Privacy, and Passage door application for a range of room needs that suits both residential and commercial spaces.



Magnetic Locks

A selection of locks designed to catch the door through magnetic pull for a minimalist aesthetic.

**Non Fire Rated*



Mortise Locks

Heavy duty commercial locks with high security function. These stainless steel bolts are designed for easy installation and interchange of handle.

**90 minute fire rated*



Pocket Door Locks

Sleek finish with a slimline design curated for pocket doors. Versatile locks for a variety of functions including passage, entry and privacy.

Specification Details

Handle Model No.	Variant	Finish	Function
DHL127	Magnetic	Black Polished Chrome Satin Chrome	Dummy Privacy Passage
DHL138	Magnetic	Stainless Steel Black	Dummy Privacy Passage
DHL133	Magnetic	Stainless Steel Black	Dummy Privacy Passage
DHL124	Magnetic	Stainless Steel Black	Dummy Privacy Passage
DHL127	Mortise	Satin Chrome Black	Entry Privacy Passage
DHL138	Mortise	Stainless Steel Black	Entry Privacy Passage
DHL133	Mortise	Stainless Steel Black	Entry Privacy Passage
DHL124	Mortise	Stainless Steel Black	Entry Privacy Passage
DHPD-F01	Pocket Door	Satin Chrome Black	Passage
DHPD-F20	Pocket Door	Satin Chrome Black	Entry
DHPD-F22	Pocket Door	Satin Chrome Black	Privacy



AccessDor

Custom Access Panels

AccessDor® cleverly conceals the appearance of the access panel by creating a flush finish to the drywall and eliminating the need for trims and architraves around the door. With only a 1/8" reveal between the door and Drywall, AccessDor blends seamlessly into the wall or ceiling, resulting in a frameless access panel. Available in standard sizes or bespoke solutions, AccessDor can be custom made to fit your specifications.




Product Details

ACCESSDOR ACCESS PANEL TIMBER LEAF DOORSET

Min / Max Door Width	10" / 3' Single	1'8" / 6' Double
Max Door Height	8'	
Door Thickness	1-3/4"	
Fire Rating	Up to 90mins	
Hinge Options	1 RocYork Concealed Hinges	

1




Options
- Available with a single piece or split piece jamb
- Available with or without doors
- Single or double access panel options available


Standard Access Panels also available, please contact the EZ Concept team for further details.


Product Options

- Fire Rating up to 90 Minutes
- T-Strike or ASA Strike Prep
- Ball Catch (T-Strike)
- PLS 24 Strike
- Adjustable Concealed Hinges
- Double Door
- PA Closer
- NoHa Invisible Handle

Installation Detail

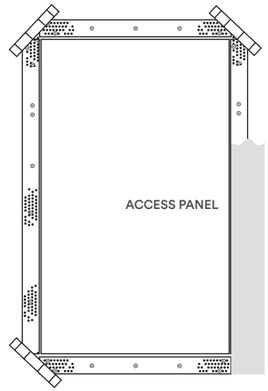

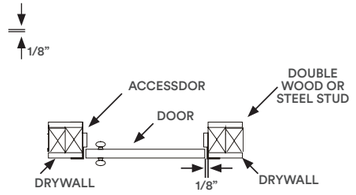

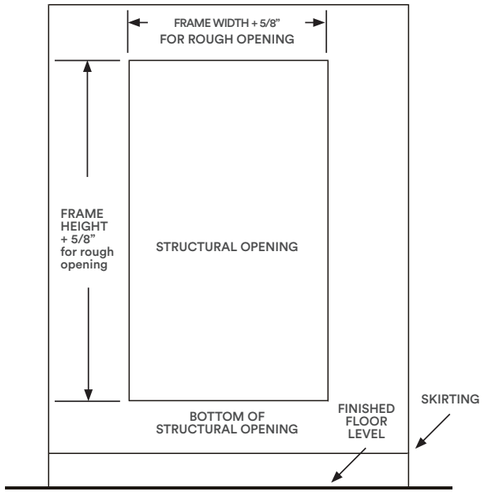

Completed Installation

AccessDor creates a minimalist finish for modern interiors. The defined aesthetic is perfect for hiding servicing hardware and requirements.

For further information or assistance in installation of AccessDor products, please visit:

https://ezconcept.com.au/resources/installation-instructions/









Installation Instructions

Step 1

Ensure that the structural opening is square, level, and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030mm metal studs on both sides of the opening. Studco recommends double studs for this installation.

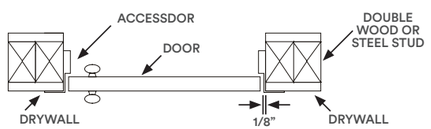

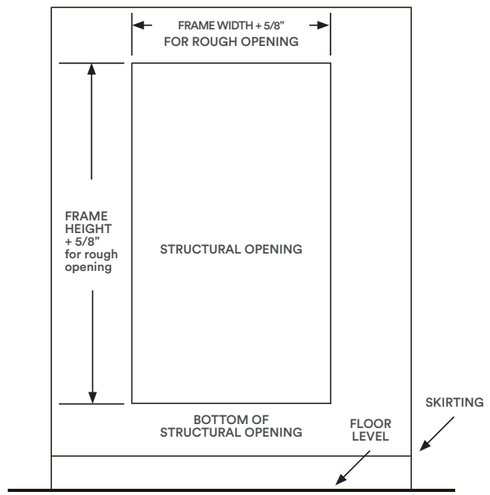



Step 2

Ensure the structural opening is square and level.


Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible.

Then screw at 8" centres up stile, screwing back through drywall into stud jamb. Double screw all ends as Detail D and beside hinge positions - both above and below hinge if using concealed hinges as Detail E.

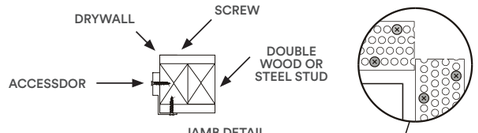


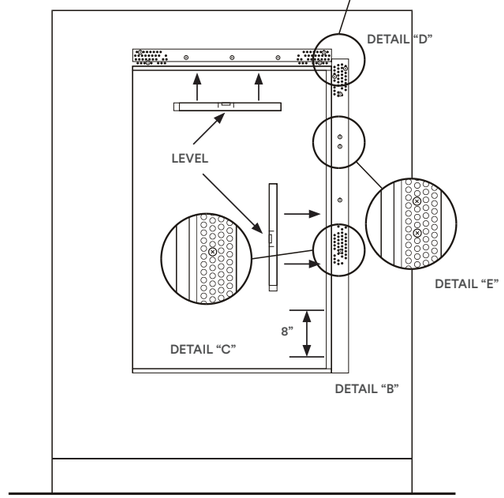


Step 2A | Head Installation

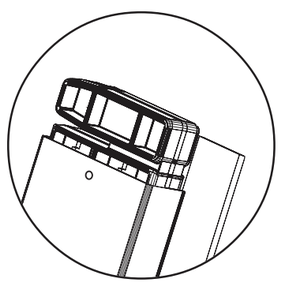

Head joiners as inserted in jamb.

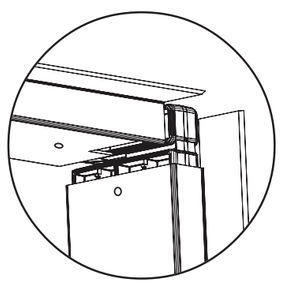

Locate head into joiner and make flush with jamb so the head joiner is not seen.

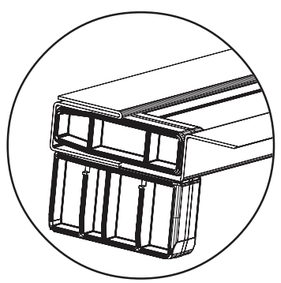


Remove the remaining head joiner out of the strike jamb into the end of the head (as shown) to receive the strike jamb. Repeat for the bottom jamb.

Installation Instructions

Step 3

Fit the final vertical section (strike jamb) into the head section joining clip. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.


Ensure the head jamb sits inside the two side jambs.
(1/16" down from top of side jamb)

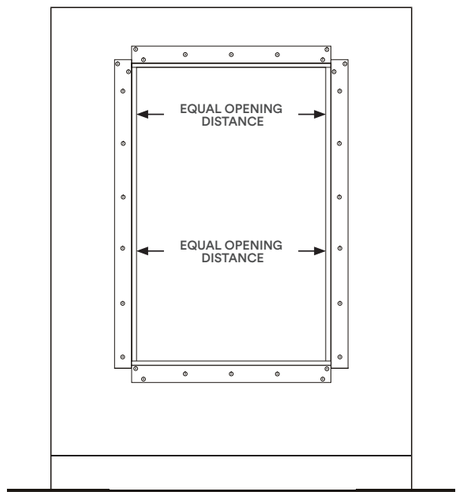


Step 4

Ensure the perforated side strips sit flat against the plasterboard to enable the jamb sections to be easily set into the wall surface. **All the corners must be taped and plastered in as Detail F.** Finish the jamb with approved plaster compound.

Hang the door in position leaving about 1/8" clearance from the top and the hinged side using the RocYork Concealed Hinges. Mount the striker plate into position to align with the strike plate punching.

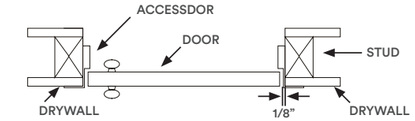

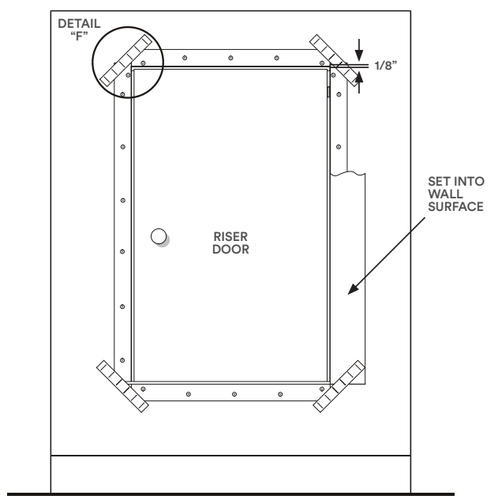

Completed Installation

The completed riser door is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.





Installation Instructions

Step 1

Ensure that the structural opening is square, level, and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030mm metal studs on both sides of the opening. Studco recommends double studs for this installation.

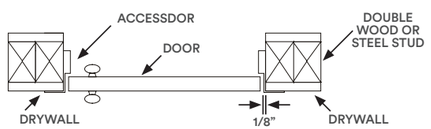

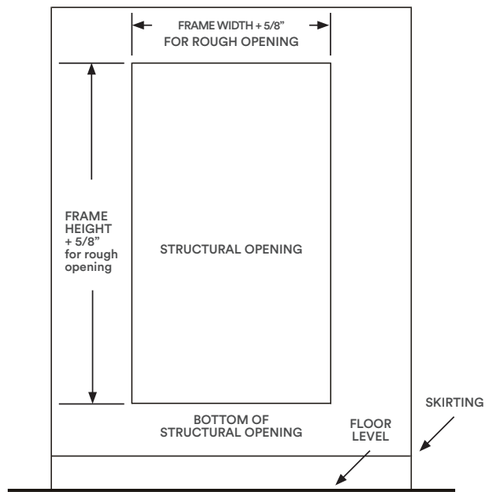



Step 2

Ensure the structural opening is square and level.


Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible.

Then screw at 8" centres up stile, screwing back through drywall into stud jamb. Double screw all ends as Detail D and beside hinge positions - both above and below hinge if using concealed hinges as Detail E.




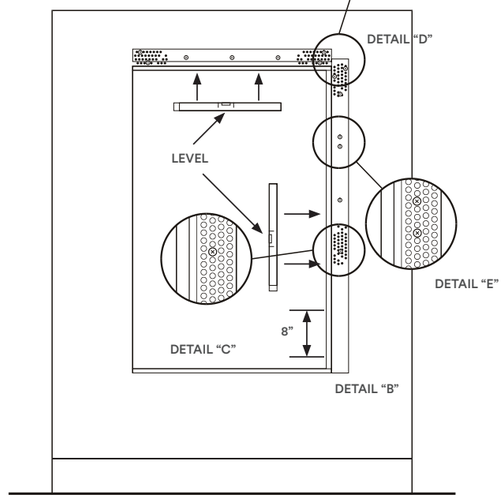


Step 2A | Head Installation



Head joiners as inserted in jamb.



Locate head into joiner and make flush with jamb so the head joiner is not seen.




Remove the remaining head joiner out of the strike jamb into the end of the head (as shown) to receive the strike jamb. Repeat for the bottom jamb.

Installation Instructions

Step 3

Fit the final vertical section (strike jamb) into the head section joining clip. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.


Ensure the head jamb sits inside the two side jambs.
(1/16" down from top of side jamb)

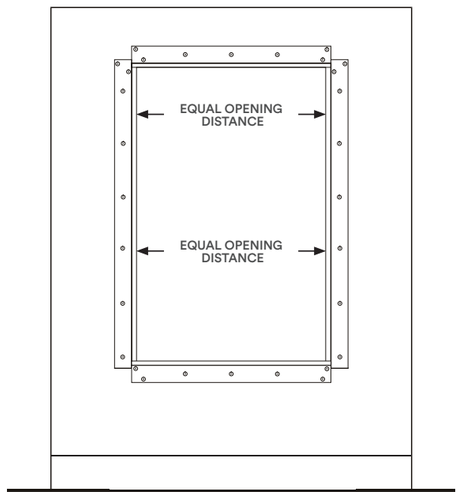


Step 4

Ensure the perforated side strips sit flat against the plasterboard to enable the jamb sections to be easily set into the wall surface. **All the corners must be taped and plastered in as Detail F.** Finish the jamb with approved plaster compound.

Hang the door in position leaving about 1/8" clearance from the top and the hinged side using the RocYork Concealed Hinges. Mount the striker plate into position to align with the strike plate punching.



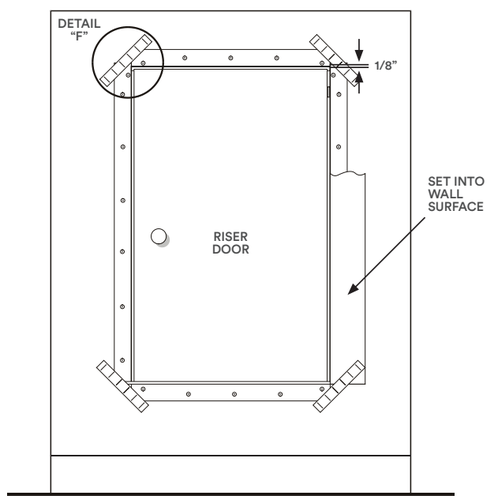


Completed Installation

The completed riser door is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.



Finishing

Products

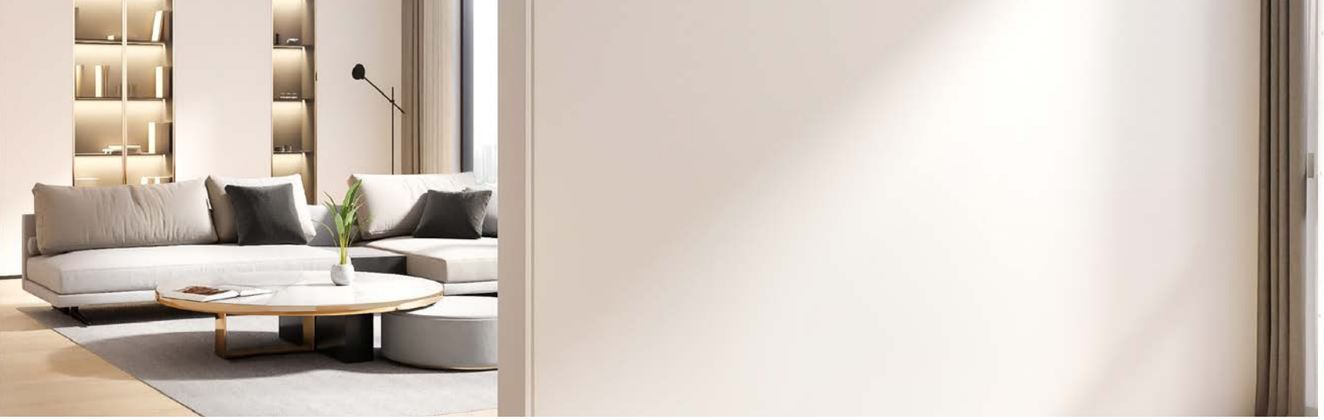

EzyCap

Wall End Solution

A steel capping for the likes of internal cased openings and internal partition wall ends. This wall end provides the strength necessary for high traffic areas susceptible to contact.

EzyCap Features

- Galvanneal finish ready to be primed and painted with the rest of the wall.
- Low time and effort involved in installation.
- Versatile aesthetic with option of flat or shadowline line cap finish.
- Shadowline reveal is 3/8".



Standard Cap



Shadowline Cap

Standard Cap Product Details

Part no.	Wall Thickness	Length	Material
EC92-358100-R	*3-1/2"*	*10' 0"*	*20ga*
EC98-378100-R	*3-3/4"*	*10' 0"*	*20ga*
EC118-458100-R	*4-1/2"*	*10' 0"*	*20ga*
EC124-478100-R	*4-3/4"*	*10' 0"*	*20ga*
EC127-5100-R	*4-7/8"*	*10' 0"*	*20ga*
EC175-678100	*6-3/4"*	*10' 0"*	*20ga*

ⓘ Custom Wall Throat, Width and 18ga material available on request

ⓘ Shadowline Cap is made to order, not available for cased openings.




FastCap

Wall & Ceiling Recessed Channel

Inspired wall and ceiling designs command attention using FastCap; this innovative solution easily inserts between the two sections of drywall to make light work of difficult recesses, drywall profiles and large oversized shadowlines.


Ideal for recessing feature lighting or hardware, custom finishing and capping of drywall is made easy with the FastCap range of custom made finishing sections.

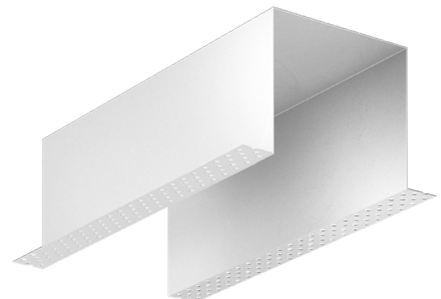

Custom FastCap Product Details

Min / Max 'a'	1/2" / 18"
Min / Max 'b'	1/2" / 18"
Perforated flange 'c'	1-1/2"
Standard lengths	10'

Custom size FastCap profile.
Please specify sizes when ordering.

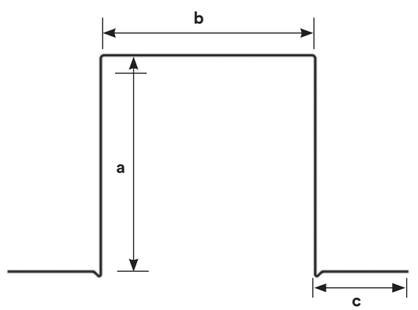

ⓘ 'a' dimension must be equal to or greater than 'b' dimension.






EzyPelmet

Fast, Economical Recessed Window Pelmet Systems


Adding a new dimension to the internal perimeter of square-set interiors, EzyPelmet® is a two-piece steel pelmet system that makes window blinds disappear, cleverly conceals feature lighting and opens vast panoramas before your eyes. EzyPelmet offers a simple and discrete transition between the interior ceiling and external windows, curtain wall facades or the building structure.

The two-piece, pre-finished steel construction of EzyPelmet makes installation simple, compared to traditional pelmet systems that require time consuming construction methods.

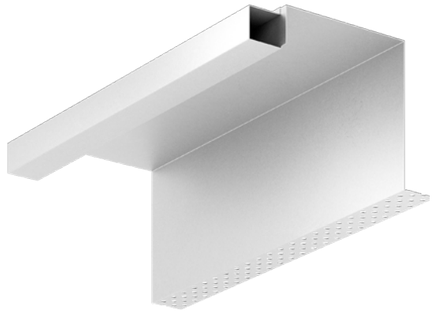

EzyPelmet Features

- Contemporary, clearview design.
- Flush-finish edge for square-set interiors.
- Completely concealed fixings.
- Does not require fixing from the top.
- Install from below after ceiling.
- Fastest method for creating window pelmets.
- Suitable for blinds, curtain, lights & more.

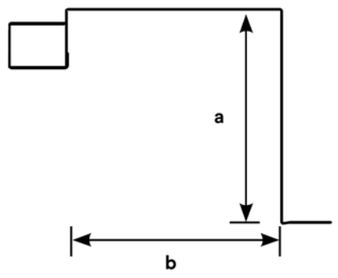


Product Details

EZYPELMET RECESSED WINDOW PELMET		
Min / Max Pelmet Height (a)	2" / 9"	
Min / Max Pelmet Width (b)	2" / 9"	
Pelmet Length	10'	*(Custom Lengths Available)*


ⓘ Dimension A & B need to be like values to manufacture.
If uneven lengths are requested, EZ Concept will need to confirm feasibility before the order is processed.

Installation Detail


Load Bearing Fixing Detail

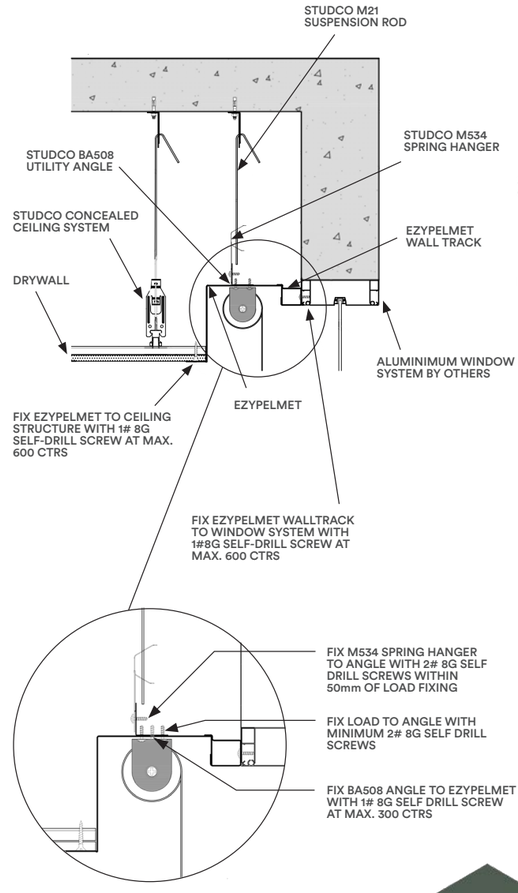

Standard Fixing Detail

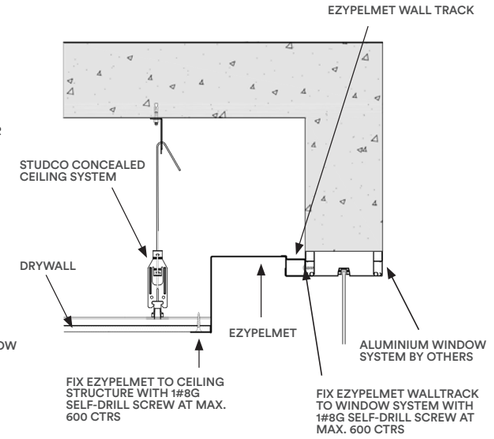

EzyPelmet Fixing Detail

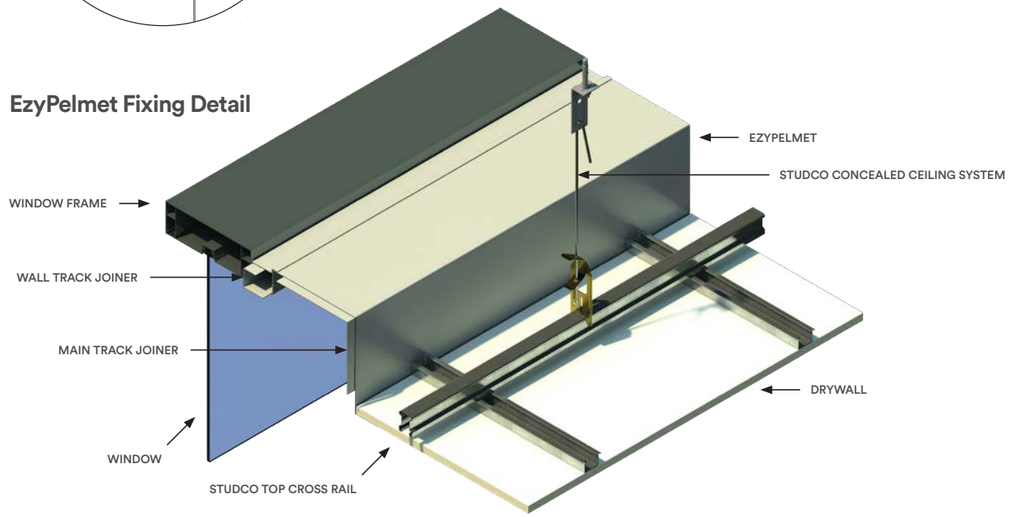




AluBase

Aluminum Baseboard Trim

AluBase® Baseboard is a modern alternative to traditional timber baseboards. AluBase is equipped to suit modern finishes in residential, and commercial office environments.




Shadowline Baseboard Trim

Features

- One piece profile manufactured from high quality aluminum.
- Concealed fixing system.
- Excellent resilience to wear and impact.
- Supplied in natural anodised finish.
- Perfect joints are easy with option joiners.
- Baseboard height 4"
- Available in 12' long pieces
- Shadowline reveal is 3/8"
- Can be used with either 1/2" or 5/8" drywall



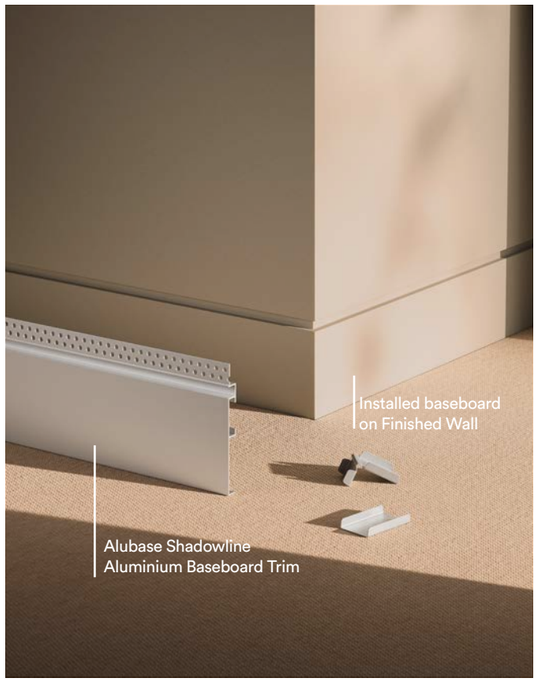

Baseboard and Connectors Details

Shadowline
SLS1290



\+



Corner Joiner

\+



Straight Joiner

=



Baseboard and Straight Joiner Connection

Flat Baseboard Trim

Features

- One piece profile manufactured from high quality aluminum.
- Excellent resilience to wear and impact.
- Supplied in natural anodised finish.
- Baseboard height 4"
- Available in 12' long pieces

Flat Baseboard
SK100










EzyReveal

Premium Square Set Trim Free Window Reveals

Eliminate trims and create pure clean lines for square set interiors using EzyReveal®. Manufactured from cold rolled steel EzyReveal® provides a strong and secure reveal eliminating warping, twisting, cracking and damage from UV rays. Installation is simple. The strong and durable metal rollformed EZ Concept sections have pre-punched perforated sides for fixing and have a specially formulated surface finish for a seamless drywall connection.

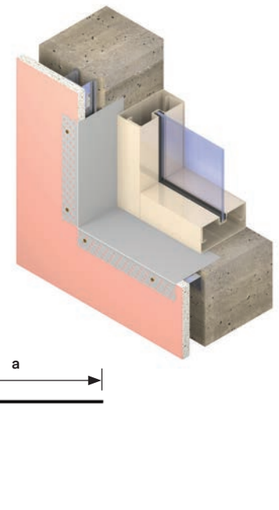

EzyReveal Features

- Designed for quick and economical finishing of reveals from 13/16” to 10-1/2”.
- 18 standard variants to suit various applications.
- Specially formulated surface finish for seamless connection with drywall.
- EzyReveal can be used with PVC finish trim to create custom size reveals.

Product Detail

Part No.	‘a’ Section Width	Length mm
RA20-1316100	13/16”	10’ 0”
RA25-1100	1”	10’ 0”
RA35-138100	1-3/8”	10’ 0”
RA45-134100	1-3/4”	10’ 0”
RA50-2100	2”	10’ 0”
RA60-238100	2-3/8”	10’ 0”
RA65-2916100	2-9/16”	10’ 0”
RA80-318100	3-1/8”	10’ 0”
RA90-3916100	3-9/16”	10’ 0”

Part No.	‘a’ Section Width	Length mm
RA100-4100	4”	10’ 0”
RA110-438100	4-3/8”	10’ 0”
RA120-434100	4-3/4”	10’ 0”
RA138-512100	5-7/16”	10’ 0”
RA150-6100	6”	10’ 0”

ⓘ Custom widths available on request


Custom Shadowline

Clean Contemporary Lines

Modern interior design is characterised by clean lines and flush finishes. Shadowline sections provide simple yet effective details to interior spaces, such as ceiling perimeters, doorways and skirting boards, amongst other applications. To create a unique profile for your project EZ Concept presents Custom Shadowline; made to meet your specific size requirements for the perfect fit in your design.

Shadowline Features

- Create the exact shadowline you need.
- Allow for variations in floor height or plaster thickness using a custom formed section.
- Heavy duty material to create a perfect straight and cleanline.

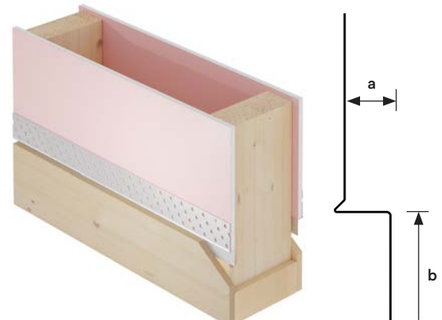

Custom size profile. Please specify sizes when ordering.

Product Detail

‘a’ Section Width	‘b’ Section Height	Length
1/2”	1/4”	10’
1/2”	1/2”	10’
1/2”	1”	10’


‘a’ Section Width	‘b’ Section Height	Length
5/8”	1/4”	10’
5/8”	1/2”	10’
5/8”	1”	10’

ⓘ Custom lengths and widths available on request

Custom Finishing Sections

Create Harmonious Finishes


The clean line and square set look can now be achieved throughout your complete project. Contact the team at Studco to assist you with creating a custom flush finish section to suit your needs. Here at Studco we can provide a whole finishing package that will enable you to deliver the flush finish look.




ⓘ Custom lengths and widths available on request

Ordering Guide


To request a quote or place an order with EZ Concept, visit **ezconcept.com/quote-request/** or email **quotes@ezconcept.com** for a request form. If you require assistance with placing an order, please call our team on **1 888 399 5262.**

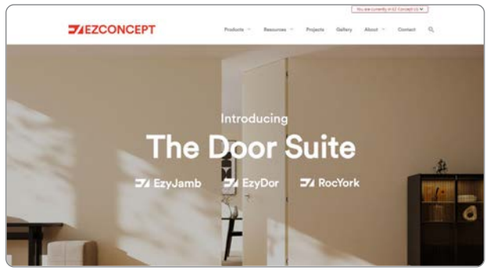

Website Main Page

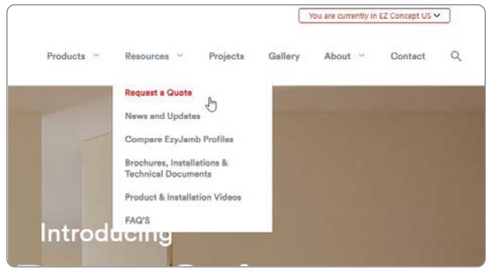

Navigate Resources > Request a Quote through Menu Bar

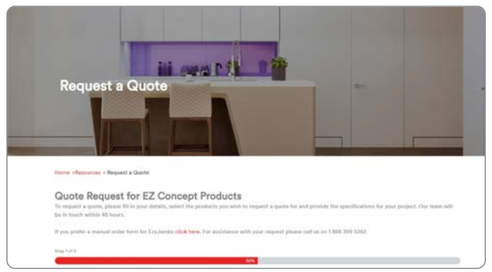

Quote Request Page



Fill in Project Details

Ordering Information and Conditions

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Always confirm lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO (first in, first out). For urgent orders, please refer to the point below.

Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EZ Concept products may not always be possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

Notes



For Sales and Technical Enquiries, please contact EZ Concept USA.

T: 1 888 399 5262
W: www.ezconcept.com
E: sales@ezconcept.com

Head Office - Rochester
1700 Boulter Industrial Parkway,
Webster, NY 14580