



 EZCONCEPT

EzyJamb


EZC | Classic Adjust Door Frame



EzyJamb

EZC | Classic Adjust Door Frame

EzyJamb® Classic Adjust - EZC is a split type door jamb system that creates inconspicuous clean lines to complete the contemporary look of architectural spaces. The two-piece jamb is made specific to your wall throat, yet has 3/8" +/- field adjustments to allow for inconsistencies at install.

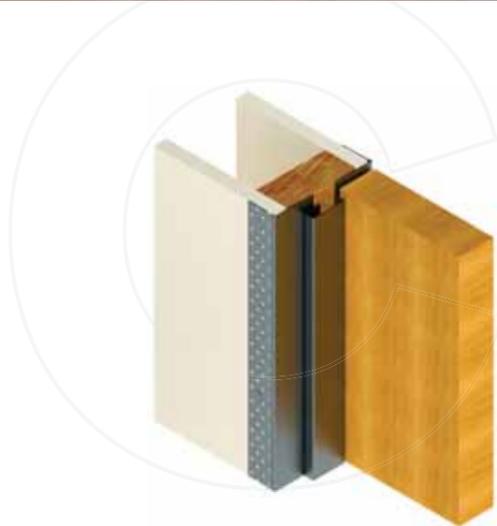


Product Details


EZYJAMB EZC CLASSIC ADJUST DOOR FRAME FOR 1-3/8 AND 1-3/4 DOORS

Material	20ga Galvanneal		
Max Width	3'-0" (Single)	6'-0" (Double)	(Custom sizes available on request)
Max Height	8'-0" (Custom sizes available on request)		
Wall Throat	3-1/2" - 8-7/8" (Custom sizes available on request)		
Fire Rating	90 minutes - Up to 3080 single, 6080 double		

- Hinge Options
- 1 Concealed Hinges
 - 2 Mortise Hinges
 - 3 Non-Mortise Hinges

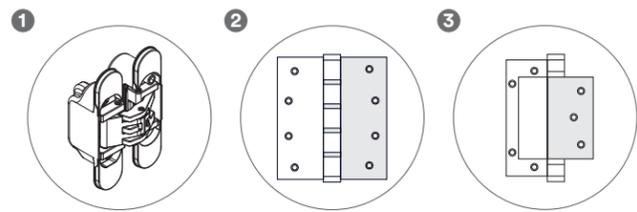


Preparation Options



Strike Options
T-Strike
DeadBolt

Hinge Options
Non-Mortise Hinge
RocYork RY-45 / RY-60



Strike Options
T-Strike
ASA Strike
DeadBolt
NoHa
Flushbolt

Hinge Options
4" Mortise Hinge
RocYork RY-45 / RY-50,
RY-60 / RY-80
Soss 216 / 416

Closer Options
Parallel Arm
Reinforcement

Specification Details

- Frame Type
- Door Thickness
- Frame Width
- Frame Height
- Finished Wall Thickness
- Fire Rating
- Strike Type
- Strike Height
- Frame Handing
- Hinge Type
- Hinge Quantity

EX. EZC - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RY80 - 3

Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.


Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.

Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

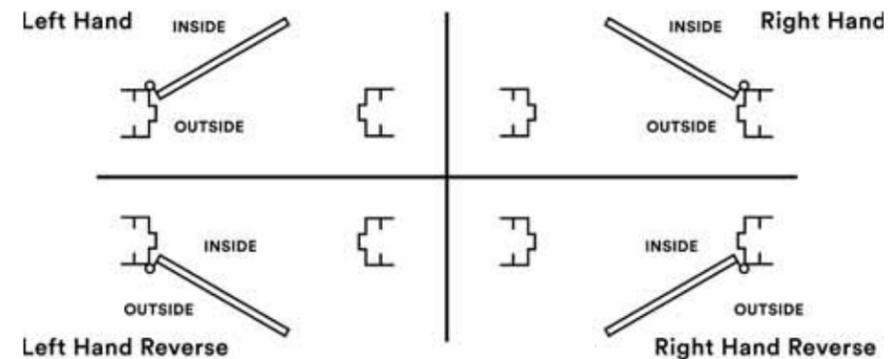

i Hand all doors by standing outside and facing the door.


EzyJamb | EZC Classic Adjust Door Frame
Installation Instructions

Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


i When using concealed hinges, the stud must be notched at each hinge location to ensure proper fitment.

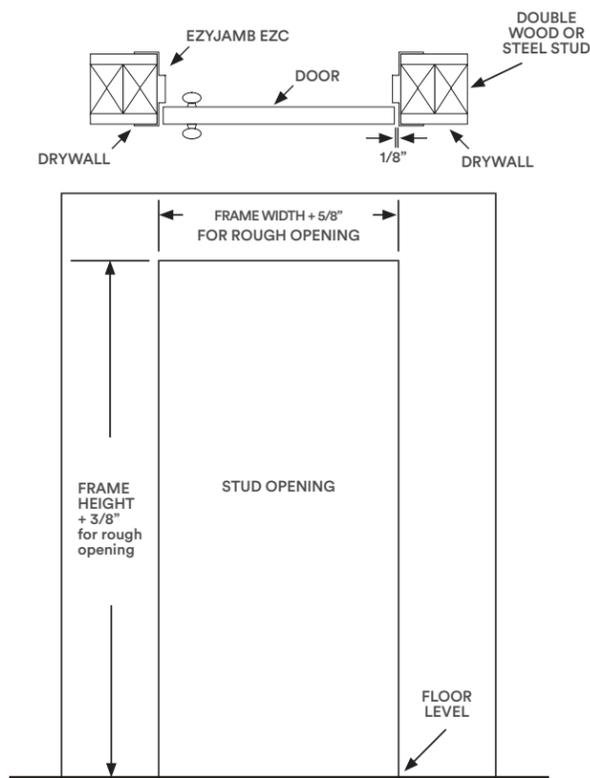

Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See Detail 'B' and 'C'.


Double screw all ends as Detail D, and beside hinge position - both above and below hinge if using concealed hinges as Detail E.

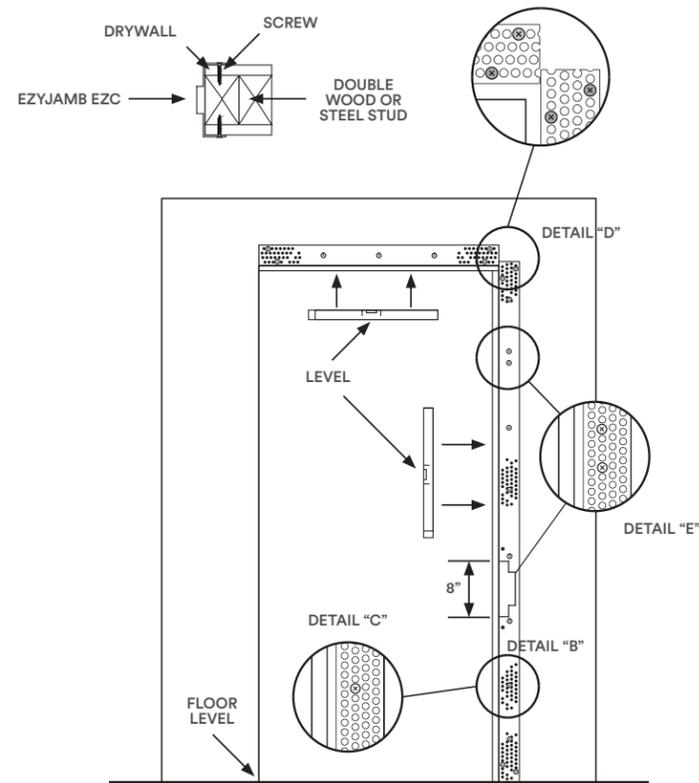

EzyJamb | EZC Classic Adjust Door Frame
Installation Instructions

Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

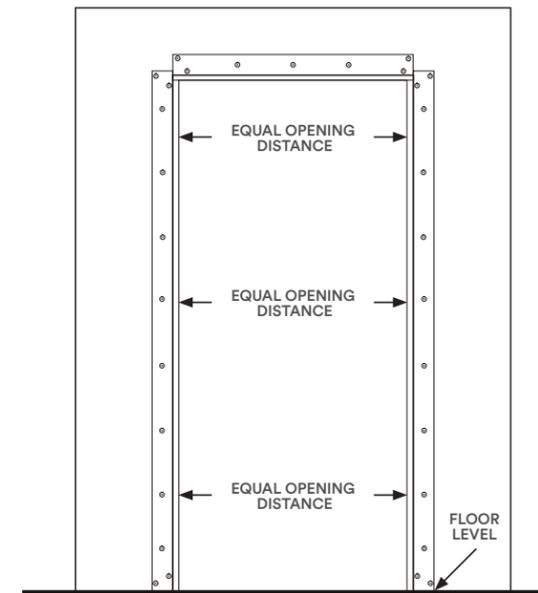


Step 4


Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

All the corners must be paper taped and mudded in as Detail F.


Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

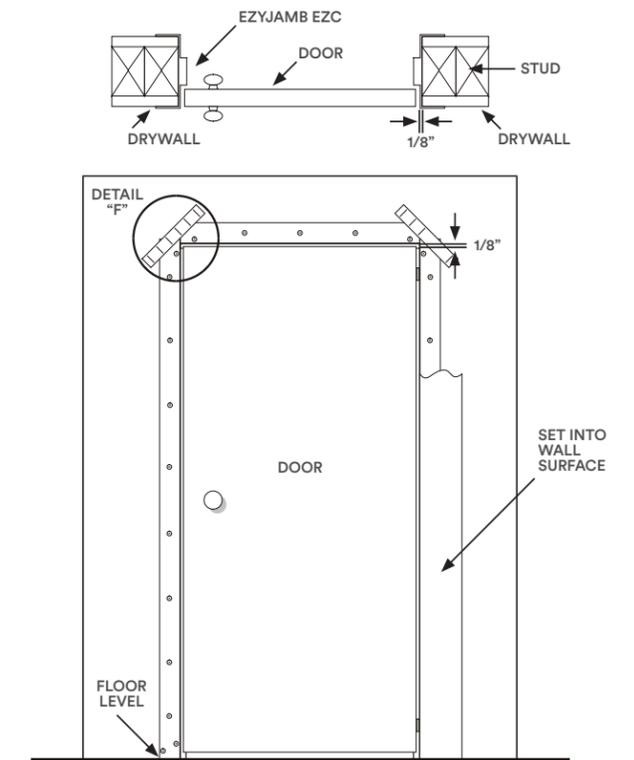


Step 2A | Head Installation



Head joiners as inserted in jamb.



Locate head into joiner and make flush with jamb so the head joiner is not seen.



Remove the remaining head joiner out of the strike jamb into the end of the head (as shown) to receive the strike jamb.

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

www.ezconcept.com/installation





For Sales and Technical Enquiries, please contact EZ Concept USA.

T: 1 888 399 5262
W: www.ezconcept.com
E: sales@ezconcept.com

Head Office - Rochester
1700 Boulter Industrial Parkway,
Webster, NY 14580

Los Angeles Office
5450 W 83rd Street
Los Angeles, CA 90045

