
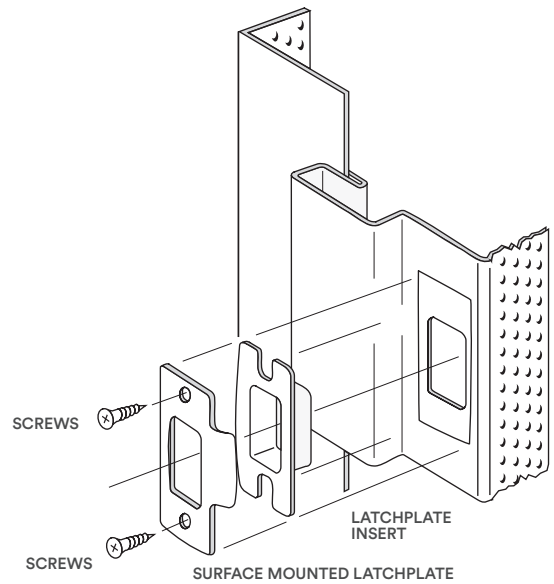
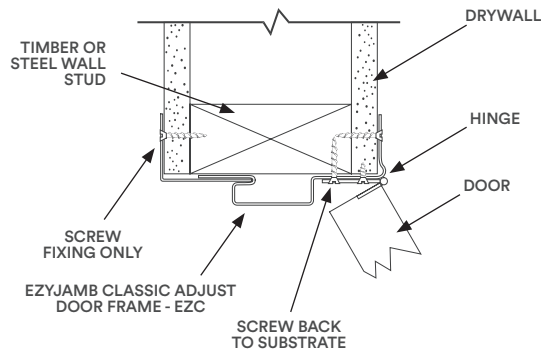
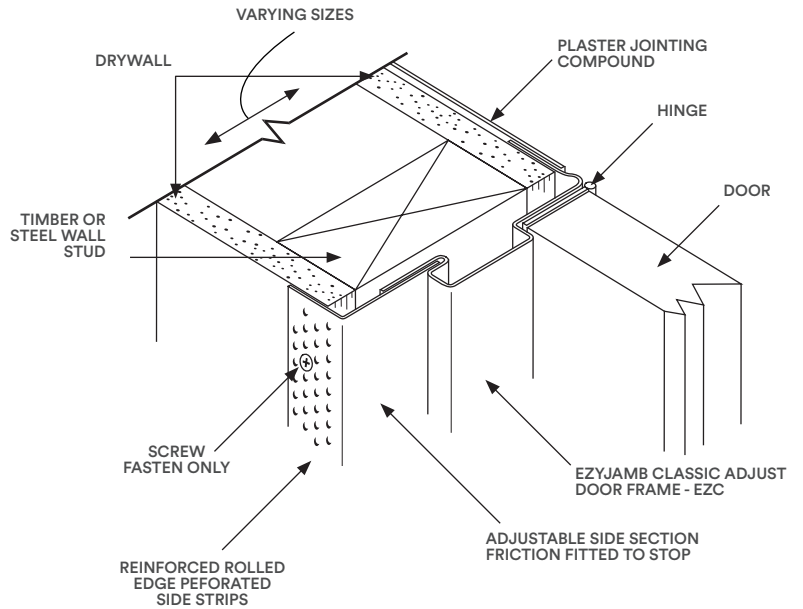


Product Datasheet

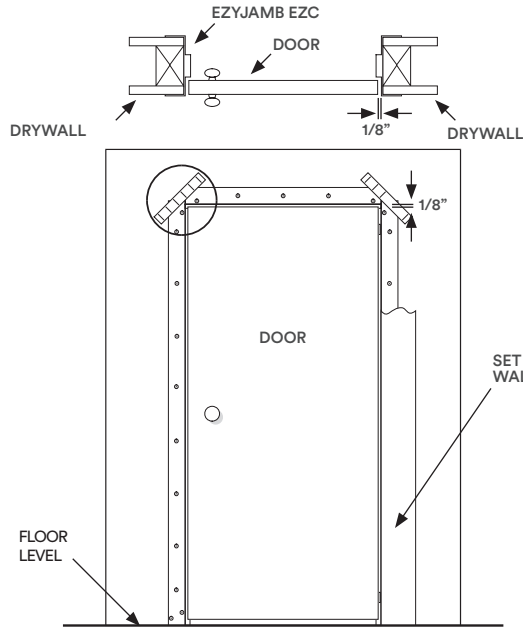

Fire Rated for up to 90 minutes

Specification Details


EzyJamb EZC Classic Adjust 20 Gauge Trimless Door Frame (For 1-3/8" & 1-3/4" Doors)

Strike Height	Standard Strike Height from bottom of frame to centreline	For 6'8" frame 36"	For 7'0" and 8'0" frames - 38"
Specifications	20 Gauge galvalneal steel door frame adjustable for wall thicknesses	3-1/2" - 8-7/8"	
Hinge Options	Invisible Hinges	Surface Hinges	Mortise Hinges
	RocYork RY-45, RY-50, RY-60, RY-80	4" Stainless Steel (630)	4" x 4" Stainless Steel (630)
	Tectus 340	4" Satin Chrome (626)	
	Soss 216 & 416	4" Oil Rubbed Bronze (613)	

Information contained within this document supersedes all previous versions and is subject to change without notice.


Product Datasheet

Preparation Options

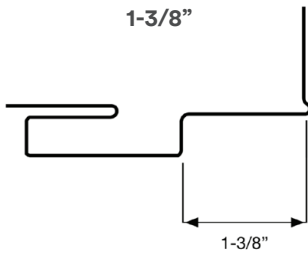

Strike Options T-Strike
DeadBolt

Hinge Options Non-Mortise Hinge
RocYork RY-45 / RY-60

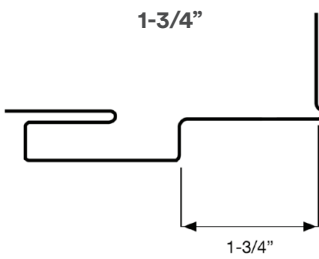


Strike Options T-Strike NoHa
ASA Strike Flushbolt
DeadBolt

Hinge Options 4" Mortise Hinge
RocYork RY-45 / RY-60 / RY-80
Soss 216 / 416

Closer Options Parallel Arm
Reinforcement

North America Door Handing

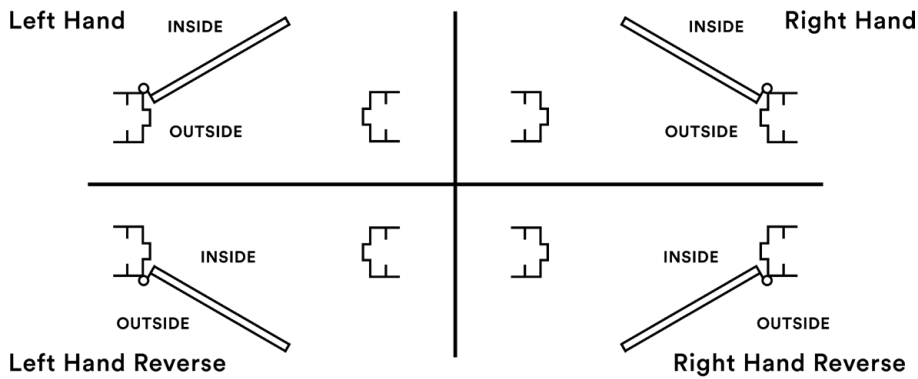

i Hand all doors by standing outside and facing the door.